



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number:

0 685 826 A2

EUROPEAN PATENT APPLICATION

Application number: **95112445.2**

Int. Cl.⁶: **G07F 3/02**

Date of filing: **10.10.91**

This application was filed on 08 - 08 - 1995 as a divisional application to the application mentioned under INID code 60.

McLean
Virginia 22101-3883 (US)

Priority: **10.10.90 US 595076**

Inventor: **Vaks, Jeffrey E.**
3 Crivelli Aisle

Date of publication of application:
06.12.95 Bulletin 95/49

Irvine,
California 92714 (US)

Publication number of the earlier application in accordance with Art.76 EPC: **0 480 736**

Inventor: **Dobbins, Bob M.**

2205 North Stone Ridge Lane
Villanova, PA 19085 (US)

Designated Contracting States:
CH DE ES FR GB IT LI

Representative: **Musker, David Charles et al**
R.G.C. Jenkins & Co.
26 Caxton Street
London SW1H 0RJ (GB)

Method and apparatus for improved coin, bill or other currency acceptance and slug or counterfeit rejection.

Methods and validation apparatus for achieving improved acceptance and rejection for coins, bills and other currency items. One aspect includes modifying item acceptance criteria by creating and defining three-dimensional acceptance clusters, the data for which are stored in look-up tables in memory associated with a microprocessor. A second aspect involves fraud prevention by temporarily tightening or readjusting item acceptance criteria when a potential fraud attempt is detected. A third aspect relates to minimizing the effects of counterfeit items such as slugs on the self-adjustment process for the item acceptance criteria. A final aspect relates to the calculation of a relative value of the acceptance criteria in order to conserve memory space and minimize computation time.

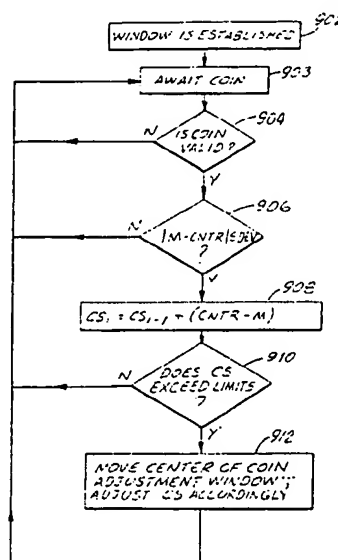


FIG.9

EP 0 685 826 A2

Technical Field

The present invention relates to the examination of coins, bills or other currency for purposes such as determining their authenticity and denomination, and more particularly to methods and apparatus for achieving a high level of acceptance of valid coins or currency while simultaneously maintaining a high level of rejection of nonvalid coins or currency, such as slugs or counterfeits. While the present invention is applicable to testing of coins, bills and other currency, for the sake of simplicity, the exemplary discussion which follows is primarily in terms of coins. The application of the present invention to the testing of paper money, banknotes and other currency will be immediately apparent to one of ordinary skill in the art.

Background Art

It has long been recognized in the field of coin and currency testing that a balance must be struck between the conflicting goals of "acceptance" and "rejection"--perfect acceptance being the ability to correctly identify and accept all genuine items no matter their condition, and perfect rejection being the ability to correctly discriminate and reject all non-genuine items. When testing under ideal conditions, no difficulty arises when trying to separate ideal or perfect coins from slugs or counterfeit coins that have different characteristics even if those differences are relatively slight. Data identifying the characteristics of the ideal coins can be stored and compared with data measured from a coin or slug to be tested. By narrowly defining coin acceptance criteria, valid coins that produce data falling within these criteria can be accepted and slugs that produce data falling outside these criteria can be rejected. A well-known method for coin acceptance and slug rejection is the use of coin acceptance windows to define criteria for the coin acceptance. One example of the use of such windows is described in U.S. Patent No. 3,918,569, assigned to the assignee of the present invention.

Of course, in reality, neither the test conditions nor the coins to be tested are ideal. Windows or other tests must be set up to accent a range of characteristic coin data for worn or damaged genuine coins, and also to compensate for environmental conditions such as extreme heat, extreme cold, humidity and the like. As the acceptance windows or other coin testing criteria are widened or loosened, it becomes more and more likely that a slug or counterfeit coin will be mistakenly accepted as genuine. As test criteria are narrowed or tightened, it becomes more likely that a genuine coin will be rejected.

GB-A-2238152 is one prior art response to the real world compromise between achieving adequately high levels of acceptance and rejection at the same time. This U.K. application describes techniques for establishing non-uniform windows that maintain a high level of acceptance while achieving a high level of rejection.

Another prior art approach is found in the Mars Electronics IntelliTrac™ Series products. The IntelliTrac™ Series products operate substantially as described in European Patent Application EP 0 155 126, which is assigned to the assignee of the present invention.

Summary of the Invention

The present invention relates to simple and cost effective methods and apparatus for achieving improved acceptance and rejection. One aspect of this invention relates to improvements in maintaining an acceptably high level of coin acceptance while achieving a much improved level of slug rejection by substantially modifying the configuration of the coin acceptance criteria. A second aspect relates to fraud prevention by temporarily tightening or readjusting the coin acceptance criteria when a potential fraud attempt is detected. A third aspect relates to minimizing the effects of counterfeit coins and slugs on the self-adjustment process for a coin acceptance window while automatically adjusting to compensate for changing environmental conditions. A fourth aspect of the present invention relates to conserving memory space and minimizing computation time in a microprocessor-based coin validation system. Other aspects of the present invention will be clear from the detailed specification which follows.

The present invention can be applied to a wide range of electronic tests for measuring one or more parameters indicative of the acceptability of a coin, currency or the like. The various aspects of the invention may be employed separately or in conjunction depending upon the desired application.

Brief Description of Drawings

Fig. 1 is a schematic block diagram of an embodiment of electronic coin testing apparatus, including sensors, suitable for use with the invention;

Fig. 2 is a schematic diagram indicating suitable positions for the sensors of the embodiment of Fig. 1;

Fig. 3 is a graphical representation of a prior art coin acceptance window for testing three coin acceptance criteria;

Fig. 4 is a graphical representation of one aspect of the present invention, namely improved

coin acceptance criteria using coin acceptance clusters;

Fig. 5 is a flow chart of the operation of the coin acceptance clusters for the improved definition of coin acceptance criteria of the present invention;

Fig. 6 is a graphical representation of a typical line distribution curve of certain measured criteria for a genuine coin;

Fig. 7A is a graphical representation of the line distribution for the genuine coin criteria of Fig. 6 drawn to include a line distribution for the same criteria of an invalid coin, to illustrate the anti-fraud or anti-cheat aspect of the present invention;

Fig. 7B is an additional graphical representation showing substantial overlap for certain measured criteria of a genuine coin line distribution and an invalid coin line distribution;

Figs. 7C and 7D are additional graphical representations showing minimal overlap for certain measured criteria for certain genuine coin line distributions and invalid coin line distributions;

Fig. 8 is a flow chart of the operation of the anti-fraud or anti-cheat aspect of the present invention;

Fig. 9 is a flow chart of the operation of the aspect of the present invention relating to minimizing the effects of counterfeit coins and slugs on the self-adjustment process for the center of the coin acceptance window;

Fig. 10 is a flow chart of a portion of the operation of the present invention relating to relative value computation and conservation of memory space and minimization of microprocessor computation time in a microprocessor based coin validation system; and

Fig. 11 is a graphical representation concerning that aspect of the present invention describing the modification of the measured response in the validation apparatus due to the presence of large changes to the reference parameter.

Detailed Description

The coin examining apparatus and methods of this invention may be applied to a wide range of electronic coin tests for measuring a parameter indicative of a coin's acceptability and to the identification and acceptance of any number of coins from the coin sets of many countries. In particular, the following description concentrates on the details for setting the acceptance limits for particular tests for particular coins, but the application of the invention to other coin tests and other coins will be clear to those skilled in the art.

The figures are intended to be representational and are not drawn to scale. Throughout this speci-

fication, the term "coin" is intended to include genuine coins, tokens, counterfeit coins, slugs, washers, and any other item which may be used by persons in an attempt to use coin-operated devices. Also, the disclosed invention may suitably be applied to validation of bills and other currency, as well as coins. It will be appreciated that the present invention is widely applicable to coin, bill and other currency testing apparatus generally.

The presently preferred embodiment of the method and apparatus of this invention is implemented as a modification of an existing family of coin validators, the Mars Electronics IntelliTrac™ Series. The present invention employs a revised control program and revised control data. The IntelliTrac™ Series operates substantially as described in European Application EP 0 155 126. That European Application is assigned to the assignee of the present invention, and is incorporated by reference herein.

Fig. 1 shows a block schematic diagram of a prior art electronic coin testing apparatus 10 suitable for implementing the method and apparatus of the present invention by making the modifications described below. The mechanical portion of the electronic coin testing apparatus 10 is shown in Fig. 2. The electronic coin testing apparatus 10 includes two principal sections: a coin examining and sensing circuit 20 including individual sensor circuits 21, 22 and 23, and a processing and control circuit 30. The processing and control circuit 30 includes a programmed microprocessor 35, an analog to digital (A/D) converter circuit 40, a signal shaping circuit 45, a comparator circuit 50, a counter 55, and NOR-gates 61, 62, 63, 64 and 65.

Each of the sensor circuits 21, 22 includes a two-sided inductive sensor 24, 25 having its series-connected coils located adjacent opposing sidewalls of a coin passageway. As shown in Fig. 2, sensor 24 is preferably of a large diameter for testing coins of wideranging diameters. Sensor circuit 23 includes an inductive sensor 26 which is preferably arranged as shown in Fig. 2.

Sensor circuit 21 is a high-frequency, low-power oscillator used to test coin parameters, such as diameter and material. As a coin passes the sensor 24, the frequency and amplitude of the output of sensor circuit 21 change as a result of coin interaction with the sensor 24. This output is shaped by the shaping circuit 45 and fed to the comparator circuit 50. When the change in the amplitude of the signal from shaping circuit 45 exceeds a predetermined amount, the comparator circuit 50 produces an output on line 36 which is connected to the interrupt pin of microprocessor 35.

The output from shaping circuit 45 is also fed to an input of the A/D converter circuit 40 which converts the analog signal at its input to a digital

output. This digital output is serially fed on line 42 to the microprocessor 35. The digital output is monitored by microprocessor 35 to detect the effect of a passing coin on the amplitude of the output of sensor circuit 21. In conjunction with

frequency shift information, the amplitude information provides the microprocessor 35 with adequate data for particularly reliable testing of coins of wideranging diameters and materials using a single sensor 21.

The output of sensor circuit 21 is also connected to one input of NOR gate 61 the output of which is in turn connected to an input of NOR gate 62. NOR gate 62 is connected as one input of NOR gate 65 which has its output connected to the counter 55. Frequency related information for the sensor circuit 21 is generated by selectively connecting the output of sensor circuit 21 through the NOR gates 61, 62 and 65 to the counter 55. Frequency information for sensor circuits 22 and 23 is similarly generated by selectively connecting the output of either sensor circuit 22 or 23 through its respective NOR gate 63 or 64 and the NOR gate 65 to the counter 55. Sensor circuit 22 is also a high-frequency, low-power oscillator and it is used to test coin thickness. Sensor circuit 23 is a strobe sensor commonly found in vending machines. As shown in Fig. 2, the sensor 26 is located after an accept gate 71. The output of sensor circuit 23 is used to control such functions as the granting of credit, to detect coin jams and to prevent customer fraud by methods such as lowering an acceptable coin into the machine with a string.

The microprocessor 35 controls the selective connection of the outputs from the sensor circuits 21, 22 and 23 to counter 55 as described below. The frequency of the oscillation at the output of the sensor circuits 21, 22 and 23 is sampled by counting the threshold level crossings of the output signal occurring in a predetermined sample time. The counting is done by the counter circuit 55 and the length of the predetermined sample time is controlled by the microprocessor 35. One input of each of the NOR gates 62, 63 and 64 is connected to the output of its associated sensor circuit 21, 22 and 23. The output of sensor 21 is connected through the NOR gate 61 which is connected as an inverter amplifier. The other input of each of the NOR gates 62, 63 and 64 is connected to its respective control line 37, 38 and 39 from the microprocessor 35. The signals on the control lines 37, 38 and 39 control when each of the sensor circuits 21, 22 and 23 is interrogated or sampled, or in other words, when the outputs of the sensor circuits 21, 22 and 23 will be fed to the counter 55. For example, if microprocessor 35 produces a high (logic "1") signal on lines 38 and 39 and a low signal (logic "0") on line 37, sensor circuit 21 is

interrogated, and each time the output of the NOR gate 61 goes low, the NOR gate 62 produces a high output which is fed through NOR gate 65 to the counting input of counter 55. Counter 55 produces an output count signal and this output of counter 55 is connected by line 57 to the microprocessor 35. Microprocessor 35 determines whether the output count signal from the counter 55 and the digital amplitude information from A/D converter circuit 40 are indicative of a coin of acceptable diameter and material by determining whether the outputs of counter 55 and A/D converter circuit 40 or a value or values computed therefrom are within stored acceptance limits. When sensor circuit 22 is interrogated, microprocessor 35 determines whether the counter output is indicative of a coin of acceptable thickness. Finally, when sensor circuit 23 is interrogated, microprocessor 35 determines whether the counter output is indicative of coin presence or absence. When both the diameter and thickness tests are satisfied, a high degree of accuracy in discrimination between genuine and false coins is achieved.

A person skilled in the art would readily be able to implement in any number of ways the specific logic circuits for the block diagram set forth in Fig. 1 and described above. Preferably, the circuitry suitable for the embodiment of Fig. 1 is incorporated in an application specific integrated circuit (ASIC) of the type presently part of the TA100 stand alone acceptor sold by Mars Electronics, a subsidiary of the assignee of the present invention. Another specific way to implement the circuitry of Fig. 1 is shown and described in European Patent Application EPO 155 126, referenced above, which is assigned to the assignee of the present invention, and which is incorporated herein by reference.

The methods of the present invention will now be described in the context of setting coin acceptance limits based upon the frequency information from sensor circuit 21. As a coin approaches and passes inductive sensor 24, the frequency of its associated oscillator varies from the no coin idling frequency, f_0 , and the output of sensor circuit 21 varies accordingly. Also, the amplitude of the envelope of this output signal varies. Microprocessor 35 then computes a maximum change in frequency f , where f equals the maximum absolute difference between the frequency measured during coin passage and the idling frequency. The f value is also sometimes referred to as the shift value. $f = \max(f_{\text{measured}} - f_0)$. A dimensionless quantity $F = f/f_0$ is then computed and compared with stored acceptance limits to see if this value of F for the coin being tested lies within the acceptability range for a valid coin. The F value is also sometimes referred to as the relative value.

As background to such measurements and computations, see U.S. Patent No. 3,918,564 assigned to the assignee of the present application. As discussed in that patent, this type of measurement technique also applies to parameters of a sensor output signal other than frequency, for example, amplitude. Similarly, while the present invention is specifically applied to the setting of coin acceptance limits for particular sensors providing amplitude and frequency outputs, it applies in general to the setting of coin acceptance limits derived from a statistical function for a number of previously accepted coins of the parameter or parameters measured by any sensor.

In the prior art, if the coin was determined to be acceptable, the F value was stored and added to the store of information used by microprocessor 35 for computing new acceptance limits. For example, a running average of stored F values was computed for a predetermined number of previously accepted coins and the acceptance limits were established as the running average plus or minus a stored constant or a stored percentage of the running average. Preferably, both wide and narrow acceptance limits were stored in the microprocessor 35. Alternatively these limits could be stored in RAM or ROM. In the embodiment shown, whether the new acceptance limits were set to wide or narrow values was controlled by external information supplied to the microprocessor through its data communication bus. Alternatively, a selection switch connected to one input of the microprocessor 35 could be used. In the latter arrangement, microprocessor 35 tested for the state of the switch, that is, whether it was open or closed and adjusted the limits depending on the state of the switch. The narrow range achieved very good protection against the acceptance of slugs; however, the tradeoff was that acceptable coins which were worn or damaged were likely to be rejected. The ability to select between wide and narrow acceptance limits allowed the owner of the apparatus to adjust the acceptance limits in accordance with his operational experience. As described further below in conjunction with a discussion of Figs. 4 and 5, the present invention has an improved and more sophisticated approach to the acceptance/rejection tradeoff.

Other ports of the microprocessor 35 are connected to a relay control circuit 70 for controlling the gate 71 shown in Fig. 2, a clock 75, a power supply circuit 80, interface lines 81, 82, 83 and 84, and debug line 85. The microprocessor 35 can be readily programmed to control relay circuit 70 which operates a gate to separate acceptable from unacceptable coins or perform other coin routing tasks. The particular details of controlling such a gate do not form a part of the present invention.

The clock 75 and power supply 80 supply clock and power inputs required by the microprocessor 35. The interface lines 81, 82, 83 and 84 provide a means for connecting the electronic coin testing apparatus 10 to other apparatus or circuitry which may be included in a coin operated vending mechanism which includes the electronic coin testing apparatus 10. The details of such further apparatus and the connection thereto do not form part of the present invention. Debug line 85 provides a test connection for monitoring operation and debugging purposes.

Fig. 2 illustrates the mechanical portion of the coin testing apparatus 10 and one way in which sensors 24, 25 and 26 may be suitably positioned adjacent a coin passageway defined by two spaced side walls 36, 38 and a coin track 33, 33a. The coin handling apparatus 11 includes a conventional coin receiving cup 31, two spaced sidewalls 36 and 38, connected by a conventional hinge and spring assembly 34, and coin track 33, 33a. The coin track 33, 33a and sidewalls 36, 38 form a coin passageway from the coin entry cup 31 past the coin sensors 24, 25. Fig. 2 also shows the sensor 26 located after the gate 71, which in Fig. 2 is shown for separating acceptable from unacceptable coins.

It should be understood that other positioning of sensors may be advantageous, that other coin passageway arrangements are contemplated and that additional sensors for other coin tests may be used.

The various aspects of the present invention will now be described.

COIN CLUSTERS - IMPROVED DEFINITION OF COIN ACCEPTANCE CRITERIA

When validating coins, two or more independent tests on a coin are typically performed, and the coin is deemed authentic or of a specific denomination or type only if all the test results equal or come close to the results expected for a coin of that denomination. For example, the influence of a coin on the fields generated by two or more sensors can be compared to measurements known for authentic coins corresponding to thickness, diameter and material content. This is represented graphically in Fig. 3, in which each of the three orthogonal axes P_1 , P_2 and P_3 represent three independent coin characteristics to be measured. For a coin of type A, the measurement of characteristic P_1 is expected to fall within a range (or window) W_{A1} , which lies within the upper and lower limits U_{A1} and L_{A1} . Similarly, the characteristics or properties P_2 and P_3 of the coin are expected to lie within the ranges W_{A2} and W_{A3} , respectively. If all three measurements lie within these ranges or windows, the coin is deemed to be an acceptable coin.

of type A. Under these circumstances, the measurements for acceptable coins will lie within the three-dimensional acceptance region designated as R_A in Fig. 3. A coin validator arranged to validate more than one type of coin would have different acceptance regions R_B , R_C , etc., for different coin types B, C, etc.

As discussed further in connection with Figs. 7B, 7C and 7D below, counterfeit coins or slugs may have sensor measurement distributions which fall within or overlap those for a genuine coin. For example, a slug may have characteristics which fall within region R_A of Fig. 3 because the slug exhibits properties which overlap those of a valid coin of that denomination. Although tighter limits on the acceptance region R_A may screen out such slugs, such a restriction will also increase the rejection of genuine coins.

The present invention, in order to provide improved coin acceptance criteria which are better defined, takes into account two observations concerning the vast majority of counterfeit coins. First, counterfeit coins do not produce the same distribution of sensor responses as do valid coins. Second, most counterfeit coins falling within an acceptance region, such as region R_A shown in Fig. 3, were on the periphery of the acceptance region and exhibited very little overlap with the values found for genuine coins. See, e.g., the histograms designated as Figs. 7B, 7C and 7D, which show the overlap for three separate coin tests, between a large set of empirically tested United States twenty-five cents coins and a large set of empirically tested foreign coins. The coin measurement criteria are represented on the abscissa of each histogram; the percentage of tested coins having specified measurement criteria may be determined from the ordinate of each histogram. It is noted that there is very little overlap on Figs. 7C and 7D.

Looking at Fig. 7B, it is seen that the data for the twenty-five cents coins significantly overlaps the data for the foreign coin for the material test illustrated in this figure. No adjustment of this test criteria can practically induce the acceptance of the foreign coin without also rejecting the vast majority of genuine twenty-five cents coins. On the other hand, for the thickness and diameter tests of Figs. 7C and 7D, the areas of overlap are much smaller and individual adjustments of the acceptance criteria could be made that would significantly increase the rejection of the foreign coin while still accepting a large number of genuine twenty-five cents coins. In its presently preferred embodiment, the present invention takes a more subtle approach than just described in that it recognizes that coin acceptance criteria such as material, thickness, diameter and the like are generally not independent of one another. For example, a slug which has coin

thickness which overlaps that typical of a genuine coin may be much more statistically likely to have a coin diameter that also overlaps that typical of a genuine coin. The present invention takes into account such interrelationships as further described below.

For a particular denomination coin, sensor response data from several different sets of sensors and for a large population of genuine coins was collected. One such distribution is illustrated in Figs. 7B, 7C and 7D, which show the peak change in sensor response for a large number of representative twenty-five cents coins submitted through a coin mechanism in a normal manner. All this data was then mapped into a three dimensional coordinate system to form a "cluster" of acceptance values. Likewise, data was collected and mapped for known counterfeit coins or slugs. The data for one such foreign coin often used as a slug is also illustrated in Figs. 7B, 7C and 7D. This data was similarly mapped into a three dimensional coordinate system, and certain points were ruled out as acceptance points.

Fig. 4 represents a mapping of coin sensor values in a three dimensional coordinate system. The point 0,0,0 at the intersection of the X_1 , X_2 , X_3 coordinate axes ("x coordinate system") represents the point of zero electrical activity for the sensing circuits, while the point f_{10} , f_{20} , A_0 represents an idle operating point for the system. The point 0,0,0 is an arbitrary starting point shown for exemplary purposes only and can be changed in response to environmental factors or the like. A vector C_0 terminates at this steady state idle operating point, and is utilized to perform a mapping from the x coordinate system, or the zero electrical activity system, to an x' coordinate system, the idle sensor response coordinate system.

The regions R_A , R_B , and R_C represent linear acceptance regions such as shown in Fig. 3 for use in detecting genuine coins of three differing denominations, while the regions C_A , C_B and C_C represent cluster regions for these same three genuine coins. Regions S_A and S_B are examples of counterfeit coin cluster regions. Vectors V_1 , V_2 and V_3 , which originate from the origin of the x' coordinate system, terminate at the genuine coin cluster centers for the sensor response distributions for each of the coin denominations, in effect mapping from the x' system to x'' systems for each of the coin clusters. This additional mapping to the x'' coordinate system saves on memory requirements and computation time for the microprocessor. Additional beneficial effects of this mapping approach are discussed below.

Coin clusters are formed and optimized for two sets of criteria. First, a mean vector for each coin type, represented by vectors V_1 , V_2 and V_3 in Fig.

4, is created. These vectors are determined based on empirical statistical data for each coin. Once these vectors are determined, increased flexibility in acceptance criteria can be accomplished by allowing and increasing "tolerance" for the location of each vector. Typically, a tolerance of plus and minus one count for each access is needed to maintain acceptance rates greater than 90%. The cluster center can also be offset by a tolerance of plus or minus two count permutations from its true position, and augmented again to achieve a higher acceptance rate of genuine coins.

The second criteria is to minimize slug acceptance. The goal of attaining the required slug rejection rate is addressed by removing the portion of the augmented coin cluster that overlaps the cluster region of a slug or slugs. An example of a portion that would be removed is shaded portion O_A in Fig. 4. This portion O_A has a very low frequency of occurrence for valid coins, and thus its removal minimally affects the coin acceptance rate. In the presently preferred embodiment, the resulting coin acceptance cluster is represented by points in a three dimensional space stored in a look-up table in memory.

Fig. 5 is a flow chart showing the operation of this aspect of the invention. For an initial coin denomination identification $i=1$ (block 503), the differences ($\Delta_1, \dots, \Delta_m$) between the measured characteristics of the coins (X_1, \dots, X_m) (block 502) and the respective center point for each vector ($Cntr_1, \dots, Cntr_m$) (block 504) are compared against upper and lower limits (block 506). In terms of the variable used on Fig. 5, i is the coin denomination index, m is the number of measured coin parameters, (L_{1i}, \dots, L_{mi}) are the lower limits and (U_{1i}, \dots, U_{mi}) are the upper limits.

If the Δ values do not fall within the appropriate limits, then the coin denomination index i is incremented (block 508) and the values are compared against the limits for another coin denomination. When the Δ values are within the limits, the system checks to see if the vector formed by the Δ values is in the look up table (block 510); if the vector is in the table, then the coin is accepted (block 512). The coin denomination variable will be incremented until valid data is determined or until all valid denomination values have been searched (blocks 514, 516). Each time the coin denomination index " i " is incremented, the system looks to that portion of the look-up table relating to that coin denomination.

In this manner a specific level of coin acceptance is achieved while maintaining a high level of slug rejection. Further, the method and apparatus of the present invention attains the rejection of slugs that produce sensor responses that are not distinguishable from those of genuine coins following an approach as illustrated in Fig. 3.

A further advantage stems from the fact that the points defining the clusters may be represented as vectors whose components are all integer numbers and the cluster volume is a finite set of integer values. Sensor response measurements are taken relative to the x' coordinate system allowing the use of a smaller set of numbers than if the measurements were taken relative to the x coordinate system. In addition, the V vectors map the x' coordinate system to the x'' coordinate system. If the mean is again removed from each measurement, then an even smaller set of integer numbers is needed to represent the cluster volume. Consequently, a canonical code may represent the cluster volumes. Representation of the coin clusters by canonical codes makes practical the use of low cost microprocessors having limited memory space, in that the specific function for each cluster can be easily stored in memory in a look-up table.

Further, a large degree of commonality was found to exist between clusters of different coin types relative to the x'' coordinate system. This commonality permits the large common portion of cluster information for all coins to be stored only once, and the remaining coin specific values to be stored separately in microprocessor memory. Consequently, a savings in memory requirements is realized.

In the preferred embodiment, the look-up table is stored in memory in a sorted fashion in order to permit a fast search through the table. The search starts in the middle of the table, and uses a search technique for fast identification of the portions of the table which contain the data of interest.

It should be noted that in order to stabilize the measurements and maintain a high degree of genuine coin acceptance with varying environmental changes, historical information for each of the C_0 and V vectors must be maintained, and these vectors must also be varied when system parameters change due to temperature, humidity, component wear and the like. These vectors point to the idle operating state of the system and are functions of parameters which may experience step changes as well as slow variations, all of which require compensation and adaptive tracking to provide a stable operating platform. Also, while the V vectors for all coin types are compensated in exactly the same manner, they can also be compensated as a function of coin denomination.

It should also be noted that the coin acceptance cluster may be created in two dimensions rather than three, based on measurement of two coin characteristics rather than three.

ANTI-FRAUD AND ANTI-CHEAT

Another aspect of the present invention involves an improved method and apparatus for avoiding a fraud practice where slugs have been used in a prior art coin validator in an attempt to move the acceptance window toward the slug distribution. The prior art method may be understood by taking all f variables as representing any function which might be tested, such as frequency, amplitude and the like, for any coin test. The specific discussion of the prior art which follows will be in terms of frequency testing for United States 5-cent coins using circuitry as shown in Fig. 1 programmed to operate as described below.

For initial calibration and tuning, a number of acceptable coins, such as eight acceptable 5-cent coins, are inserted to tune the apparatus for 5 cent-coins. The frequency of the output of sensor circuit 21 is repetitively sampled and the frequency values f_{measured} are obtained. A maximum difference value, f , is computed from the maximum difference between f_{measured} and f_0 during passage of the first 5-cent coin. $f = \max(f_{\text{measured}} - f_0)$.

Next, a dimensionless quantity, F , is calculated by dividing the maximum difference value f by f_0 where $F = (f/f_0)$. The computed F for the first 5-cent coin is compared with the stored acceptance limits to see if it lies within those limits. Since the first 5-cent coin is an acceptable 5-cent coin, its F value is within the limits. The first 5-cent coin is accepted and microprocessor 35 obtains a coin count C for that coin.

The coin count C is incremented by one every time an acceptable coin is encountered until it reaches a predetermined threshold number. Until that threshold number is reached, new F values are stored based on the last coin accepted. When that threshold number is reached, a flag is set in the software program to use the latest F value as the center point to determine the acceptance limits of the acceptance "window" for subsequently inserted coins. The originally stored limits are no longer used, and the new limits may be based on the latest F value plus or minus a constant, or computed from the latest F value in any logical manner. Once the apparatus is tuned as discussed above, it is capable of performing in an actual operating environment.

The coin mechanism was designed to continually recompute new F values and acceptance limits as additional coins were inserted. If a counterfeit coin was inserted, its F value theoretically would not be within the acceptance limits so the coin would be rejected. After rejection of a counterfeit coin a new idling frequency, f_0 , was measured and then the microprocessor 35 awaited the next coin arrival.

Recomputation of the F values and acceptance limits in this manner allowed the system to self-tune and recalibrate itself and thus to compensate for component drift, temperature changes, other environmental shifts and the like. In order for beneficial compensation to be achieved, the computation of new F values was done so that these values were not overly weighted by previously accepted coins.

While achieving many benefits, the prior art system has suffered because in practice a slug exists whose measured characteristics overlap those for a known acceptable coin as illustrated in Fig. 7A. In Fig. 7A, the item designated 710 is a line distribution for certain measurement criteria of a genuine coin. Curve 720 is a line distribution for the same measurement criteria of a slug. The overlap is shown as the shaded area 730 in Fig. 7A. As a result, the repeated insertion of these slugs will move the window center point toward the slug by tracking as those slugs are accepted. Eventually, acceptance will be 100% for the slug and poor for the valid coin.

The present invention addresses this problem as discussed below.

Acceptance criteria for any given denomination coin may be illustrated by the measured distribution of coin test data from the center point of a coin acceptance window. In the preferred embodiment of the present invention, as discussed earlier in this application, the dimensionless quantity F is computed and then compared with stored acceptance limits to see if the computed value of F for the coin being tested lies within a certain distribution in the coin acceptance window. Fig. 6 is a representation of such a distribution having a center point at zero and acceptance limits at "+3" and "-3". Item 610 in Fig. 6 represents a measured criteria line distribution for a genuine coin.

In practice, invalid coins have distributions that slightly overlap those of genuine coins. Item 710 in Fig. 7A depicts the genuine coin line distribution of Fig. 6 having a center point at "0", and the overlapping line distribution of an invalid coin or slug having a center point at "5". The invalid coin line distribution is designated as 720. Of course, there are distributions for invalid coins other than that shown in Fig. 7A, including distributions to the left of the genuine coin distribution 710. The genuine coin distribution and the invalid coin distribution shown in Figs. 6 and 7A are exemplary only.

It is readily seen that the line distribution of characteristic data for the genuine coin overlaps with the line distribution for the invalid coin in the shaded area 730 shown in Fig. 7A. For a coin mechanism employing window self-adjustment, such as that described above with respect to the prior art, repeated insertion of invalid coins, some

of which have characteristics just within the outer edges of the genuine coin acceptance window, will cause the system to move the center point of the coin acceptance window toward the distribution pattern of the invalid coin. This "tracking" eventually results in acceptance of invalid coins and rejection of genuine coins. A person wishing to cheat or defraud the coin mechanism need only repeatedly insert a certain invalid coin into the coin mechanism, thereby in effect programming the system to accept non-genuine coins, resulting in a significant loss of revenue.

To combat such behavior, the present invention provides for improved invalid coin rejection by preventing this "tracking" of the center point of the acceptance window toward the invalid coin distribution. This is accomplished by sensing any invalid coin that has parameters which fall close to the outer limits of the coin acceptance window, such as within a "near miss" area "z" in the invalid coin distribution between points "3" and "4" on the graph in Fig. 7A.

The sequence of steps followed for this method are set forth in the flow chart of Fig. 8. First, a determination is made whether a submitted coin is valid (block 812, Fig. 8). Coins having specified parameters within the genuine coin acceptance window, for example as defined by symmetrical limits "+3" and "-3" around the center point "0" of the genuine coin distribution of Figs. 6 and 7A, are considered valid; those coins outside of that coin acceptance window are considered not valid.

If the coin is not valid, the system determines whether the cheat mode flag is set (block 802). If that flag is not set, a determination is made whether the invalid coin fits within the "near miss" area, "z" between "3" and "4" on Fig. 7A (block 804). If the answer to that inquiry is yes, the system moves the center of the coin acceptance window a preset amount away from the invalid coin distribution curve (block 806). For example, with reference to Fig. 7A, the center of the coin acceptance window is moved from "0" to "-1". Alternatively, the right acceptance boundary may be moved from "3" to "2". In either case, very few genuine coins will not be accepted, but essentially all invalid coins will now be rejected, thereby preventing any attempted fraud.

A cheat counter is then cleared (block 808), and the cheat mode flag is set (block 810). If another invalid coin is then inserted into the mechanism, the system recognizes that the cheat mode flag is set (block 802), and no changes are made to the center position of the coin acceptance window.

With regard to the Fig. 7A example, the center of the coin acceptance window is maintained at its "-1" position until a preset, threshold number of

valid coins of the same denomination are counted in the cheat counter. The cheat counter can be reset to zero if another invalid coin is submitted to the mechanism which has a characteristic which fits within the "near miss" area "z" on Fig. 7A.

Once the cheat counter reaches the desired threshold number, the cheat mode flag is cleared and the center of the coin acceptance window is moved back to its original position. These steps are shown on the Fig. 8 flowchart, in the left-hand column, blocks 812 to 824.

Specifically, after block 812 determines that the coin is valid, block 814 recognizes that the cheat mode flag is set. If the valid coin is the same denomination as what triggered the cheat mode flag (block 816), then the cheat counter is incremented (block 818). When the cheat counter reaches its preset threshold limit (block 820), the cheat mode flag is cleared (block 822), and the acceptance window is returned to its original position (block 824).

In the Fig. 7A example, the center of the coin acceptance window is moved from "-1" back to "0" once the threshold number of valid coins is counted in the cheat counter.

By this method, attempts to train the coin mechanism to accept counterfeit coins, slugs and the like are thwarted, in that the center of the coin acceptance window will not move toward the invalid coin distribution if the user repeatedly inserts a number of the invalid coins into the coin mechanism, even though some of these coins would normally be acceptable and some would only miss being acceptable by a small amount such that a slight movement of the acceptance criteria would result in their acceptance. In fact, according to this aspect of the present invention, the coin acceptance window moves away from the invalid coin distribution for certain non-valid coins or slugs, until such time as a threshold number of valid coins are counted.

The above described method can be used for any denomination coins. Further, the value of various parameters is adjustable, including but not limited to the threshold value of genuine coins required to clear the cheat mode flag, the width of that portion of the invalid coin distribution which triggers the cheat mode (area "z" in Fig. 7A), and the distance that the center of the coin acceptance window is moved away from the invalid coin distribution. These and other parameters may be customized for each denomination coin and any other special conditions relating to the coin mechanism or the coins. For example, if it is known that a counterfeit coin having a certain distribution is often mistaken for a genuine U.S. twenty-five cents coin, then the acceptance window for this coin can be programmed to move a distance out of the range

of that counterfeit coin and to stay there for a minimum of 10 or more genuine U.S. quarter coin validations.

This anti-fraud and anti-cheat method and apparatus may be used independently of the other aspects of this invention in any coin testing apparatus in which the coin criteria can be adjusted by the control logic which controls the coin, bill or other currency test apparatus. However, the presently preferred embodiment is to incorporate this anti-fraud, anti-cheat aspect in conjunction with the other aspects of the present invention in one system.

IMPROVED COIN ACCEPTANCE WINDOW CENTER SELF-ADJUSTMENT

A method for self-adjustment of the center of the coin acceptance window involves accumulating a sum of the deviations from the center of the coin acceptance window for each coin. When the sum of deviations equals or exceeds a pre-set value, the center position of the coin acceptance window is adjusted.

By one aspect of the present invention, only small or gradual deviations from the center point of the coin acceptance window are added to the running sum of deviations. Abrupt or large deviations in the coin variables outside of this small deviation band are ignored in terms of center adjustment, as it is recognized that adjustment based on such large deviations tends to unduly shift the coin acceptance windows toward the acceptance of counterfeit coins, slugs and the like, and away from acceptance of genuine coins.

Fig. 9 is a flow chart showing the steps involved in this aspect of the present invention. First, the coin mechanism is "taught" in the usual manner, e.g., utilizing 8 valid coins to establish the necessary information concerning the coin acceptance window. Outside limits are then set for the window in any one of a number of conventional manners or using the cluster technique described above. These steps are combined in block 902, which states that the window is established. If the coin is not accepted as valid (block 904), no adjustment to the center of the coin adjustment window (designated in Fig. 9 as CNTR) is made and the system waits for the next coin (block 903).

If the coin is determined to be valid (block 904), then the absolute value difference between M, the measured criteria for that particular coin, and CNTR is compared to the center adjustment deviation limit DEV (block 906). If this absolute value difference is less than the limit DEV, then the cumulative sum value CS is modified by adding to it the value "CNTR - M" (block 908).

If the absolute value difference between M and CNTR exceeds the limit DEV (block 906), then no adjustment is made to the cumulative sum CS, and the system awaits arrival of the next coin.

When the cumulative sum CS equals or exceeds a certain positive cumulative sum limit, or is equal to or less than a negative cumulative sum limit (block 910), the value of CNTR is incremented by a preset amount or is decremented by a preset amount, as appropriate (block 912). The cumulative sum CS is then adjusted accordingly, and the system awaits the arrival of the next coin.

Thus, it is seen that only valid coins having small deviations from the center value CNTR of the coin adjustment window affect the self-adjustment of that center value. Coins which deviate outside this limited deviation range do not effect the center self-adjustment. Since counterfeit coins and slugs will almost in all cases deviate from the center point CNTR more than the limit DEV amount, this method virtually insures that counterfeit coins, slugs and the like will not affect the center self-adjust mechanism.

The method for protecting the center self-adjustment mechanism described above allows a wider coin acceptance window to be utilized, thereby increasing the frequency that genuine coins will be accepted by the system.

In the preferred embodiment, this improved coin acceptance window center self-adjustment is utilized in combination with all other aspects of the present invention. However, it is to be understood that this center-adjust method may be used independently of, or in various combinations with, the aspects of the present invention.

RELATIVE VALUE COMPUTATION

It is beneficial to employ a low-cost microprocessor to calculate the dimensionless F value discussed above, which may also be referred to as the relative value. To this end, in order to perform calculations based upon the F value, a scaling factor of 256 was utilized to ease processing, and the resulting number was truncated to the nearest integer.

This method of calculation resulted in some loss of resolution. For example, when the ratio of the scaling factor of 256 and the rest value f_0 was greater than one, not all integer values existed within the range covered by the relative values F for a certain rest value f_0 . For example, if the rest value f_0 was 128 KHz, then the relative value F would be even numbers. ($F = f/128 \cdot 256 = f \cdot 2$). Similarly, only odd values of F existed if f_0 was an odd number. Further, when the rest value f_0 changed, the list of non-existing values changed also. Consequently, an expanded look-up table was

required in order to accommodate all possible relative values F . This consumed expensive memory space, and increased the computation time spent for coin validation.

Also, use of such a high scaling factor as 256 meant that oftentimes the integer value of F was much greater than unity, and therefore extra memory space was required to store the necessary data for the F value, the center of the coin acceptance window and the limits of that window.

Further, for sensors operating at high frequencies, validation resolution was lost, as one integer relative value F represented several possible actual shift values f , due to truncation. For example, if a sensor operated at $f_0 = 1024$ KHz, then 256 divided by 1024 equals $1/4$, which became the multiplier for the shift value f . In this example, for f values of 4, 5, 6 and 7 KHz, at $f_0 = 1024$ KHz, $F = 1$ for all four f values. This resulted in a loss in resolution which reduced the ability of the coin mechanism to separate counterfeit from genuine coins.

Lastly, in the prior art systems, truncation of the calculation of the F relative value resulted in a 0.5 bias of the center of the coin adjustment window. This is because all values between integers were truncated downward. Since window centers could only be adjusted in increments of plus or minus one, the center was always biased by plus or minus 0.5 in steady state. This further reduced the coin acceptance rate. If a plus or minus one expansion of the window width was used to compensate for the reduced coin acceptance rate, the result was increased acceptance of counterfeit coins.

Another aspect of the present invention, described below, provides additional resolution over the usage in the prior art systems of the 256 scaling factor. The relative value F is now preferably calculated according to the following equation: $F = f \cdot E(f_0)/f_0$, where $E(f_0)$ is the exponentially weighted moving average (also referred herein to as the EWMA) of the rest value (f_0) calculated for each variable and coin denomination separately. The theoretical equation for the exponentially weighted moving average at coin increment is:

EQUATION A: $E(f_0)_i = E(f_0)_{i-1} + W \cdot (f_{0i} - E(f_0)_{i-1}) + 0.5$ where W = weighing factor, and has a value between 0 and 1. The result is rounded as opposed to truncated to eliminate the 0.5 bias error. For the first validation measurement, $E(f_0)$ is set to equal f_0 where f_0 is the rest value during the "teaching" of the unit, as that teaching is described earlier in this application. Through computer simulation, it has been determined that a value for W of $1/40$ results in the best performance of the coin mechanism. Over time, the ratio of $E(f_0)_i/f_{0i}$ approaches unity in the steady state of f_0 .

The ratio of the exponentially weighted moving average ($E(f_0)$) and the instantaneous rest value (f_{0i}) will have moderate deviations from unity, with larger deviations being rare. On those occasions when an abrupt change of the rest value f_0 occurs, the ratio of $E(f_0)/f_0$ may significantly deviate from unity, partially compensating for the shift value f change. This makes it possible for window center self-adjustment without a significant expansion of the window. Further, while the window is being self-adjusted the ratio of the $E(f_0)/f_{0i}$ gradually comes back to unity if no new perturbations occur for a large enough amount of submitted coins.

Fig. 11 shows a step change of the rest value f_0 to f_0' and the curve of the exponentially weighted moving average $E(f_0)$, shown as a dotted line. Any step changes in rest values, f_0 , that would easily throw the shift values f outside the acceptance window must be compensated for by $E(f_0)$ to provide a smooth transition from one operating point to another. Referring to Fig. 11, this smooth transition should be at a rate that is slower than the tracking rate of the system. $E(f_0)/f_0$ allows the window center to track the shift value with some delay as shown in Fig. 11.

As long as the relative deviation of the rest value f_0 from its exponentially weighted moving average, multiplied by the shift value f , is within the range plus or minus 0.5, this aspect of the present invention does not create gaps between relative values F . This method provides for a sufficient coin acceptance rate allowing for fast self-adjustment of centers of coin acceptance windows following abrupt and large changes in rest values f_0 in most cases. Further, the new method produces relative values F having no loss of resolution and also eliminates the 0.5 bias by rounding, allowing for improved counterfeit coin rejection. Another advantage is ease of microprocessor implementation since the exponentially weighted moving average can be easily calculated. Current values of the exponentially weighted moving average need to be calculated separately for each rest value and stored, and only one constant value of W need be stored.

It should be noted that EQUATION A for the exponentially weighted moving average given above is just one example of an equation having the required characteristics. The required characteristics include that the ratio $(E(f_0)_i/f_{0i})$ must go to unity in steady state, and that during a transition in rest the ratio $(E(f_0)/f_0)$ must be such that when multiplied by the shift value f , the relative value F must fall within the acceptance window, so that an adjustment of the center of the coin acceptance window can be made.

The exponentially weighted moving average (EWMA) can be calculated to compensate for var-

ious changes such as unit aging, wear, contamination and cleaning, ambient temperature, etc. This can be accomplished in the following manner, as shown in the flow chart of Fig. 10.

The initial EWMA ($E(f_0)$) equals the rest value f_0 at the time the mechanism is "taught". Deviations between the subsequently computed EWMA and the relevant rest value f_{0i} are then summed (block 102, Fig. 10). When the absolute value of the sum of deviations (S_i) exceeds a threshold value $1/W$ (block 104), then the EWMA is incremented or decremented by a preset amount (depending on the sign of the deviation sum), and the deviation sum is adjusted accordingly (block 106). In the preferred embodiment, the EWMA is moved "+1" or "-1" when the sum of deviations exceeds the threshold value of $1/W$. If the sum of deviations does not exceed the threshold, the system awaits arrival of the next coin (block 112).

In place of frequency, any parameter having a rest value (such as amplitude) may be used.

A further aspect of the present invention involves combining all of the above disclosed methods in one coin, bill or other currency validation apparatus. Of course, other combinations and permutations of the above aspects are also contemplated and may be found beneficial by those skilled in the art.

The operation of the electronic coin testing apparatus 10 and the methods described herein will be clear to one skilled in the art from the above discussion.

Claims

1. A method of operating a money validation apparatus in which at least one output signal is produced in response to the presence of items of money, and acceptance of an item of money depends upon whether the output signal falls within an acceptance window defined by an acceptance boundary, and the acceptance window is modified on the basis of output signals of accepted items of money so as to self-adjust said window, characterised in that a deviation limit is set within said acceptance boundary, and in that said acceptance window is modified if the output signal lies within the deviation limit.
2. The method of claim 1 wherein the acceptance window is also defined by a second acceptance boundary wherein the first and second acceptance boundaries are located about a reference value.
3. The method of claim 2, further comprising the steps of:
 - setting a second deviation limit between the reference value and the second acceptance boundary; and
 - modifying the acceptance window if the value of the output signal lies between the reference value and the second deviation limit.
4. The method of any preceding claim wherein the step of modifying the acceptance window comprises adjusting a reference value, by reference to which the or each said acceptance boundary is defined.
5. The method of claim 4 in which the step of adjusting the reference value comprises incrementing or decrementing the reference value if enough accepted items had output signals lying within the deviation limit.
6. The method of claim 5, further comprising:
 - updating a cumulative sum depending on the relationship between the output signal of an accepted item and the reference value;
 - incrementing or decrementing the reference value by corresponding preset amounts when the cumulative sum respectively exceeds a first predetermined limit or falls below a second predetermined limit; and then
 - resetting the cumulative sum.
7. The method of any preceding claim, wherein the money validation apparatus utilises a plurality of acceptance boundaries, corresponding to items of money of different types, and wherein each acceptance boundary has an associated deviation limit.
8. The method of any preceding claim, in which the or each acceptance boundary is associated with a coin type, and the output signal corresponds to at least one coin characteristic selected from coin diameter, coin material and coin thickness.
9. The method of any preceding claim, comprising the initial steps of:
 - testing a plurality of known genuine items of a specified type using the apparatus;
 - producing an initial output signal for each genuine item;
 - computing an initial reference value based on a function of all of the initial output signals; and
 - establishing an acceptance limit based on the initial reference value.
10. The method of any preceding claim, wherein the distance from the centre of said accep-

tance window to the or each deviation limit is small in comparison to that from the centre to the or each acceptance boundary.

11. Money validation apparatus arranged to operate the method according to any of claims 1 to 10.

12. A method of operating a money validation apparatus having at least one sensor circuit and a processing and control circuit, for discriminating genuine items from counterfeit items, comprising:

sensing data characteristic of at least two characteristics of each of a plurality of genuine items of a first type;

converting the sensed data into a plurality of data points;

selecting data points to form a cluster of data points representative of genuine items of a first type;

storing the cluster;

testing an item and generating a data point corresponding to said at least two characteristics for the item;

comparing the data point of the item to the stored cluster; and

accepting the item as an item of the first type if its data point matches one of the data points within the cluster.

13. A method of operating a money validation apparatus having at least one sensor circuit and a processing and control circuit, for discriminating genuine items from counterfeit items, comprising:

sensing data characteristic of at least two characteristics of each of a plurality of genuine items representative of the universe of items to be validated;

converting the sensed data into a plurality of data points for each item type;

selecting data points to form clusters of data points representing each item type;

storing the clusters;

testing an item and generating a data point corresponding to said at least two characteristics for the item;

comparing the data point of the item to the stored clusters; and

accepting the item as an item of a particular type if its data point matches that in a cluster corresponding to that type item.

14. The method of claim 12 or 13, further comprising:

sensing data characteristic of said at least two characteristics from a plurality of known

counterfeit items of a first type;

converting the sensed data into a plurality of counterfeit data points;

comparing the counterfeit data points to the data points in each cluster; and

selectively eliminating data points in each cluster which match counterfeit data points.

15. The method of claim 12 or 13, further comprising the steps of:

representing the data points of each cluster as vectors having coordinates corresponding to said at least two characteristics.

16. The method of claim 15, further comprising the steps of:

defining and storing an operation vector;

defining and storing mean vectors for each cluster which originate at the endpoint of the operation vector and terminate at a mean data point for each cluster;

defining cluster vectors for each cluster which originate at the endpoint of the mean vector and terminate at each data point;

modifying the mean vectors so that the clusters overlap and storing a modification value for each mean vector corresponding to each item type; and

storing common cluster vectors once in memory wherein a savings in memory space is achieved.

17. The method of claim 16, further comprising the steps of:

representing a tested item data point as a tested item vector;

modifying the tested item vector by each modification value and comparing each result to the stored cluster vectors; and

accepting the item as a genuine item of a particular type if its vector matches a cluster vector.

18. The method of claim 16, further comprising: storing the cluster vectors in a look-up table in memory.

19. The method of claim 18, wherein the cluster vectors are stored in a sorted fashion.

20. The method of claim 16, wherein the cluster vectors are represented by a canonical code.

21. The method of claim 16, further comprising: establishing predefined tolerances for the cluster vectors.

22. The method of claim 21, wherein the cluster vector tolerances are plus or minus one count.
23. The method of claim 16, wherein the mean data points are generated based on empirical statistical data for each item type. 5
24. The method of claim 16, wherein the operation vector originates at a zero operating point of the system and terminates at an idling operation point of the system. 10
25. The method of claim 24, wherein the zero operating point corresponds to zero electrical activity in the system, and wherein the idling operation point corresponds to the idle sensor response of the system. 15
26. The method of claim 24, further comprising:
 maintaining historical values concerning the money validation apparatus in memory;
 comparing the historical values to current values; and
 modifying the operation vector when the historical values do not match the current values. 20 25
27. The method of claim 26, wherein the historical values are related to environmental changes and component wear. 30
28. A method of operating a money validation apparatus for discriminating genuine items of different types from counterfeit items, comprising: 35
 sensing data characteristic of at least two characteristics of each of a plurality of genuine items representative of the universe of items to be validated;
 converting the sensed data into a plurality of vectors for each item type; 40
 storing the vectors in a look-up table in memory;
 calculating a mean vector for each item type; 45
 testing an item and generating a vector corresponding to said at least two characteristics for the item;
 calculating the difference between the item vector and the mean vector for an item type; 50
 comparing the difference to a first mean vector tolerance;
 incrementing an item denomination index, recalculating the difference and comparing the difference to a mean vector tolerance for another item type if the comparison did not fall within the first mean vector tolerance; 55
 searching an item type look-up table if the difference falls within the corresponding mean vector tolerance; and
 accepting the item if its vector is found in a look-up table, or rejecting the item if its vector is not found.
29. A method as claimed in any of claims 12 to 28, when applied to a coin validation for discriminating genuine coins from counterfeit items.
30. The method of claim 29, wherein said at least two characteristics comprise at least two of coin diameter, coin material, and coin thickness.
31. The method of claim 29, wherein said at least two characteristics comprise three characteristics corresponding to coin diameter, coin material and coin thickness.
32. A coin validation apparatus, comprising:
 an inductive sensor for sensing data corresponding to at least two coin characteristics;
 a processing and control circuit connected to the sensor for generating data points, for forming coin clusters, and for controlling system operation;
 a memory means connected to the processing and control circuit;
 comparison circuitry for comparing sensed data from a tested item to the stored coin clusters; and
 gating means under control of said processing and control circuit for accepting coins whose data matches that of a stored
33. A method as claimed in any one of claims 12 to 31 wherein data points forming a cluster represent an acceptance criteria for a genuine item type, the method further including the step of defining an anti-cheat criteria for each genuine item type, and restricting the acceptance criteria for an item type by a predetermined amount if an item data point corresponding to an item which has failed to be accepted is within the anti-cheat criteria for that item type.
34. A coin validation apparatus, comprising:
 an inductive sensor for sensing data corresponding to at least two coin characteristics;
 a processing and control circuit connected to the sensor for generating data points, for forming acceptance criteria represented as coin clusters, for defining anti-cheat criteria, for restricting the acceptance criteria if a rejected item data point is within the anti-cheat criteria,

- and for controlling system operation;
 a memory means connected to the processing and control circuit;
 comparison circuitry for comparing sensed data from a tested item to the stored coin clusters; and
 gating means under control of said processing and control circuit for accepting coins whose data matches that of a stored coin cluster and for rejecting items whose data does not match.
35. A coin validation apparatus, comprising:
 an inductive sensor for sensing data corresponding to at least two coin characteristics;
 a processing and control circuit connected to the sensor for defining anti-cheat criteria, for restricting the acceptance criteria, and for controlling system operation;
 a memory means connected to the processing and control circuit;
 comparison circuitry for comparing sensed data from a tested item to the stored coin clusters; and
 gating means under control of said processing and control circuit for accepting coins whose data matches that of a stored coin cluster and for rejecting items whose data does not match.
36. A method as claimed in any one of claims 12 to 31 and 33 to 35, wherein the validation apparatus tests items using acceptance criteria comprised of data having a center point, the method comprising the steps of:
 setting a deviation limit which is small in comparison to the distance from the center data point to a boundary of the acceptance criteria; and
 modifying the acceptance criteria for an item type by incrementing or decrementing the center data point if enough accepted items of that type had data points within the deviation limit.
37. A method of operating a money validation apparatus which utilizes acceptance criteria corresponding to genuine items of different types, wherein the acceptance criteria is comprised of characteristic data having a center point, comprising:
 setting a deviation limit which is small in comparison to the distance from the center point to a boundary of the acceptance criteria;
 testing an item and generating characteristic data for the item;
 accepting the item as being of a particular type if its characteristic data is within the ac-

ceptance criteria corresponding to that type; and,

modifying the acceptance criteria by incrementing or decrementing the center point if enough accepted items had characteristic data within the deviation limit.

38. The method of claim 36 or 37, further comprising:
 calculating the absolute difference between the data point of an accepted item and the center point of the acceptance criteria;
 adding the difference of the center point and the data of the accepted item to a cumulative sum if the absolute difference is less than or equal to the deviation limit; and
 incrementing the center point of the acceptance criteria by a preset amount when the cumulative sum exceeds a predetermined limit, or decrementing the center point by a preset amount when the cumulative sum is less than a predetermined negative limit; and
 resetting the cumulative sum.
39. The method of claim 36 or 37, wherein each acceptance criteria has a unique deviation limit.
40. The method of claim 36 or 37, wherein the acceptance criteria represent coins and the characteristic data is comprised of at least one characteristic corresponding to coin diameter, coin material, or coin thickness.
41. A coin validation apparatus, comprising:
 an inductive sensor for sensing data corresponding to at least two coin characteristics;
 a processing and control circuit connected to the sensor for generating data points, for defining acceptance criteria represented as coin clusters, for defining a deviation limit, for modifying the acceptance criteria, and for controlling system operation;
 a memory means connected to the processing and control circuit;
 comparison circuitry for comparing sensed data from a tested item to the stored coin clusters; and
 gating means under control of said processing and control circuit for accepting coins whose data matches that of a stored coin cluster and for rejecting items whose data does not match.
42. A coin validation apparatus, comprising:
 an inductive sensor for sensing data corresponding to at least two coin characteristics;
 a processing and control circuit connected

to the sensor for setting a deviation limit, for modifying acceptance criteria used in the testing of items, and for controlling system operation;

a memory means connected to the processing and control circuit;

comparison circuitry for comparing sensed data from a tested item to the acceptance criteria; and

gating means under control of said processing and control circuit for accepting coins whose data matches stored acceptance criteria and for rejecting items whose data does not match.

43. A method as claimed in any one of claims 12 to 31, 33 to 35 and 36 to 40, including the steps of:

measuring a rest value for each sensor;

measuring shift values for each sensor corresponding to respective characteristics;

calculating exponentially weighted moving averages based on the rest values;

calculating relative values for the item based on the shift values, the rest values, and the exponentially weighted moving averages;

generating a data point based on the relative values;

comparing the data point of the item to stored acceptance criteria; and

accepting the item as an item of a particular type if its data point matches acceptance criteria corresponding to that type of item.

44. A method for calculating a relative value of an item for comparison to genuine item data in a money validation apparatus having at least one sensor circuit and a processing and control circuit, comprising:

measuring a rest value of the sensing circuit;

measuring a shift value of the sensing circuit caused by the item;

calculating an exponentially weighted moving average based on the rest value; and

calculating the relative value for the item based on the shift value, the rest value and the exponentially weighted moving average of the rest value.

45. The method of claim 43 or 44, wherein the relative value is calculated by multiplying the shift value and the exponentially weighted moving average of the rest value, and dividing by the rest value.

46. The method of claim 43 or 44, wherein the exponentially weighted moving average in-

cludes a weighing factor.

47. The method of claim 46, wherein the weighting factor has a value between 0 and 1.

48. The method of claim 47, wherein the weighting factor is 1/40.

49. The method of claim 43 or 44, wherein the exponentially weighted moving average of the rest value is rounded to provide a smooth transition rate from one system operating point to another as items are validated.

50. The method of claim 49, wherein the smooth transition rate is slower than the tracking rate of the system.

51. The method of claim 43 or 44, wherein an exponentially weighted moving average is calculated to provide compensation for various system operation changes.

52. The method of claim 51, wherein compensation is provided for unit aging, wear, contamination due to maintenance procedures, and ambient temperature changes.

53. A coin validation apparatus, comprising:
an inductive sensor for sensing data corresponding to at least two coin characteristics;
a processing and control circuit connected to the sensor for generating data points, for forming coin clusters, for calculating relative values, and for controlling system operation;
a memory means connected to the processing and control circuit;
comparison circuitry for comparing sensed data from a tested item to the stored coin clusters; and

gating means under control of said processing and control circuit for accepting coins whose data matches that of a stored coin cluster and for rejecting items whose data does not match.

54. A coin validation apparatus, comprising:
an inductive sensor for sensing data corresponding to at least two coin characteristics;
a processing and control circuit connected to the sensor for measuring rest values and shift values, for calculating an exponentially weighted moving average and a relative value, and for controlling system operation;
a memory means connected to the processing and control circuit;
comparison circuitry for comparing sensed data from a tested item to the stored coin

clusters; and

gating means under control of said processing and control circuit for accepting coins whose data matches that of a stored coin cluster and for rejecting items whose data does not match.

55. A method of operating a money validation apparatus having at least one sensor circuit and a processing and control circuit, for discriminating genuine items from counterfeit items, comprising:

sensing data characteristic of at least two characteristics of each of a plurality of genuine items of different item types;

converting the sensed data into a plurality of data points for each item type;

selecting data points to form clusters of data points representing an acceptance criteria for each genuine item type;

storing the clusters;

defining a center data point for each cluster;

defining a deviation limit which is small in comparison to the distance from the center data point to a cluster boundary data point;

defining an anti-cheat criteria for each item type;

testing an item and generating a data point for the item;

comparing the item data point to the clusters;

rejecting the item if its data point does not match any of the clusters and restricting the acceptance criteria by a predetermined amount if the rejected item data point is within the anti-cheat criteria;

accepting the item if its data point is within a cluster; and

modifying the acceptance criteria by incrementing or decrementing the center data point of a cluster if enough accepted items had data points within the deviation limit.

56. A coin validation apparatus, comprising:

an inductive sensor for sensing data corresponding to at least two coin characteristics;

a processing and control circuit connected to the sensor for generating data points, for forming acceptance criteria represented as coin clusters, for defining anti-cheat criteria, for defining deviation limits, for restricting or modifying the acceptance criteria, and for controlling system operation;

a memory means connected to the processing and control circuit;

comparison circuitry for comparing sensed data from a tested item to the stored coin

clusters; and

gating means under control of said processing and control circuit for accepting coins whose data matches that of a stored coin cluster and for rejecting items whose data does not match.

57. A method of operating a money validation apparatus having a sensor circuit and a processing and control circuit, for discriminating genuine items from counterfeit items, comprising the steps of:

sensing data characteristic of at least two characteristics from a plurality of genuine items of different item types;

converting the sensed data into a plurality of data points for each item type;

selecting data points to form clusters of data points representing an acceptance criteria for each genuine item type;

storing the clusters;

defining an anti-cheat criteria for each genuine item type;

measuring a rest value for each sensor;

testing an item by measuring shift values for each sensor corresponding to said at least two characteristics;

calculating exponentially weighted moving averages based on the rest values;

calculating relative values for the item based on the shift values, the rest values, and the exponentially weighted moving averages;

generating a data point for the item based on the relative values;

comparing the data point of the item to the stored clusters;

accepting the item if its data point matches a cluster, or rejecting the item if no match is found; and

restricting the acceptance criteria for an item type by a predetermined amount if a rejected item data point is within the anti-cheat criteria for that item type.

58. A coin validation apparatus, comprising:

an inductive sensor for sensing data corresponding to at least two coin characteristics;

a processing and control circuit connected to the sensor for generating data points, for defining acceptance criteria, for calculating relative values, for defining anti-cheat criteria, for restricting the acceptance criteria, and for controlling system operation;

a memory means connected to the processing and control circuit;

comparison circuitry for comparing sensed data from a tested item to the stored coin clusters; and

gating means under control of said processing and control circuit for accepting coins whose data matches that of a stored coin cluster and for rejecting items whose data does not match.

59. A method in an item validation apparatus having a sensor circuit and a processing and control circuit, for discriminating genuine items from counterfeit items, comprising the steps of:

sensing data characteristic of at least two characteristics from a plurality of genuine items of different item types;

converting the sensed data into a plurality of data points for each item type;

selecting data points to form clusters of data representing an acceptance criteria for each genuine item type;

storing the clusters;

defining a center data point for each cluster;

setting a deviation limit which is small in comparison to the distance from the center data point to a cluster boundary data point;

measuring a rest value for each sensor;

testing an item by measuring shift values for each sensor corresponding to said at least two characteristics;

calculating exponentially weighted moving averages based on the rest values;

calculating relative values for the item based on the shift values, the rest values, and the exponentially weighted moving averages;

generating a data point for the item based on the relative values;

accepting the item as being a particular type if its data point is within a cluster corresponding to that type; and

modifying the acceptance criteria by incrementing or decrementing the center data point of a cluster if enough accepted items of that type had data points within the deviation limit.

60. A coin validation apparatus, comprising:

an inductive sensor for sensing data corresponding to at least two coin characteristics;

a processing and control circuit connected to the sensor for generating data points, for forming acceptance criteria, for setting a deviation limit, for calculating relative values, for modifying the acceptance criteria and for controlling system operation;

a memory means connected to the processing and control circuit;

comparison circuitry for comparing sensed data from a tested item to the stored coin clusters; and

gating means under control of said pro-

cessing and control circuit for accepting coins whose data matches that of a stored coin cluster and for rejecting items whose data does not match.

61. A method of operating a money validation apparatus having at least one sensor circuit and a processing and control circuit, for discriminating genuine items from counterfeit items, comprising:

sensing data characteristic of at least two characteristics of each of a plurality of genuine items of different item types;

converting the sensed data into a plurality of data points for each item type;

selecting data points to form clusters of data points representing an acceptance criteria for each genuine item;

storing the clusters;

defining a center data point and an anti-cheat criteria for each cluster;

setting a deviation limit which is small in comparison to the distance from the center data point to a cluster boundary data point;

measuring a rest value for each sensor;

testing an item by measuring shift values for each sensor corresponding to said at least two characteristics;

calculating exponentially weighted moving averages based on rest values;

calculating relative values for the unknown item based on the shift values, the rest values, and the exponentially weighted moving averages;

generating a data point for the item based on the relative values;

comparing the item data point to the stored clusters;

rejecting the item if its data point does not match any of the clusters and restricting the acceptance criteria of an item type by a predetermined amount if the rejected item data point is within the anti-cheat criteria for that item type;

accepting the item if its data point is within a cluster; and

modifying the acceptance criteria by incrementing or decrementing the center data point of a cluster if enough accepted items of that type had data points within the deviation limit.

62. A coin validation apparatus, comprising:

an inductive sensor for sensing data corresponding to at least two coin characteristics;

a processing and control circuit connected to the sensor for generating data points, for defining acceptance criteria and anti-cheat criteria and deviation limits, for calculating rela-

tive values, for restricting or modifying the acceptance criteria, and for controlling system operation;

a memory means connected to the processing and control circuit;

comparison circuitry for comparing sensed data from a tested item to the stored coin clusters; and

gating means under control of said processing and control circuit for accepting coins whose data matches that of a stored coin cluster and for rejecting items whose data does not match.

63. A method of operating a money validation apparatus which utilizes acceptance criteria to validate genuine items of different types, wherein the acceptance criteria is comprised of characteristic data having a center point, comprising:

setting a deviation limit which is small in comparison to the distance from the center point to a boundary of the acceptance criteria;

testing an item and generating characteristic data for the item;

comparing the data point of the item to the acceptance criteria;

restricting the acceptance criteria for an item type by a predetermined amount if a rejected item characteristic data is within the anti-cheat criteria for that item;

accepting the item if its characteristic data is within acceptance criteria corresponding to that type; and

modifying the acceptance criteria by incrementing or decrementing the center point if enough accepted items had characteristic data within the deviation limit.

64. The method of claim 63, further comprising:

setting a cheat mode flag for an item type when a rejected item causes modification of an acceptance criteria;

clearing a cheat mode counter for that item type;

incrementing the cheat mode counter when a genuine item of the same type is detected and the cheat mode flag is set;

clearing the cheat mode flag when the cheat mode counter reaches a predetermined threshold value; and

returning the acceptance criteria of the item to its unrestricted position when the cheat mode flag is cleared.

65. The method of claim 64, wherein the anti-cheat criteria, the deviation limit, and the predetermined threshold value are adjustable.

66. A coin validation apparatus, comprising:

an inductive sensor for sensing data corresponding to at least two coin characteristics;

a processing and control circuit connected to the sensor for defining anti-cheat criteria and deviation limits, for restricting or modifying the acceptance criteria, and for controlling system operation;

a memory means connected to the processing and control circuit;

comparison circuitry for comparing sensed data from a tested item to the stored coin clusters; and

gating means under control of said processing and control circuit for accepting coins whose data matches that of a stored coin cluster and for rejecting items whose data does not match.

67. A method of operating a money validation apparatus having at least one sensor circuit and a processing and control circuit, which utilizes acceptance criteria corresponding to genuine items of different types, comprising:

measuring a rest value for each sensor;

testing an item by measuring shift values of the sensors;

calculating exponentially weighted moving averages based on the rest values;

calculating relative values for the unknown item based on the shift values, the rest values, and the exponentially weighted moving averages;

generating characteristic data for the item based on the relative values;

comparing the item characteristic data to the acceptance criteria; and

restricting acceptance criteria for an item type by a predetermined amount if a rejected item characteristic data is within the anti-cheat criteria.

68. A coin validation apparatus, comprising:

an inductive sensor for sensing data corresponding to at least two coin characteristics;

a processing and control circuit connected to the sensor for defining anti-cheat criteria, for calculating relative values, for restricting the acceptance criteria, and for controlling system operation;

a memory means connected to the processing and control circuit;

comparison circuitry for comparing sensed data from a tested item to the stored coin clusters; and

gating means under control of said processing and control circuit for accepting coins whose data matches that of a stored coin cluster.

ter and for rejecting items whose data does not match.

69. A method of operating a money validation apparatus having at least one sensor circuit and a processing and control circuit, which utilizes acceptance criteria corresponding to genuine items of different types, wherein the acceptance criteria is comprised of characteristic data having a center point, comprising: 5
- setting a deviation limit which is small in comparison to the distance from the center point to a boundary of the acceptance criteria; 10
 - defining an anti-cheat criteria; 15
 - measuring a rest value for each sensor; 20
 - testing an item by measuring shift values of the sensors; 25
 - calculating exponentially weighted moving averages based on the rest values; 30
 - calculating relative values for the item based on the shift values, the rest values, and the exponentially weighted moving averages; 35
 - generating characteristic data for the item based on the relative values; 40
 - comparing the characteristic data of the item to the acceptance criteria; 45
 - rejecting the item if its characteristic data is outside the acceptance criteria, and restricting acceptance criteria for an item type by a predetermined amount if the rejected item characteristic data is within the anti-cheat criteria; and 50
 - accepting the item if its characteristic data is within an acceptance criteria and modifying the acceptance criteria by incrementing or decrementing the center point if enough accepted items had characteristic data within the anti-cheat criteria. 55
70. A method of operating a money validation apparatus having at least one sensor circuit and a processing and control circuit, which utilizes acceptance criteria corresponding to genuine items of different types, wherein the acceptance criteria is comprised of characteristic data having a center point, comprising: 40
- setting a deviation limit which is small in comparison to the distance from the center point to a boundary point of the acceptance criteria; 45
 - measuring a rest value for each sensor; 50
 - testing an item by measuring shift values of the sensors; calculating exponentially weighted moving averages based on the rest values; 55
 - calculating relative values for the item based on the shift values, the rest values and the exponentially weighted moving averages;

generating characteristic data for the item based on the relative values;

accepting the item as being of a particular type if its characteristic data is within the acceptance criteria corresponding to that type; and

modifying the acceptance criteria by incrementing or decrementing the center point if enough accepted items had characteristic data within the deviation limit.

71. A coin validation apparatus, comprising: 15
- an inductive sensor for sensing data corresponding to at least two coin characteristics; 20
 - a processing and control circuit connected to the sensor for defining deviation limits for calculating relative values, for modifying the acceptance criteria, and for controlling system operation; 25
 - a memory means connected to the processing and control circuit; 30
 - comparison circuitry for comparing sensed data from a tested item to the stored coin clusters; and 35
 - gating means under control of said processing and control circuit for accepting coins whose data matches that of a stored coin cluster and for rejecting items whose data does not match. 40
72. The apparatus of claim 32, 34, 35, 41, 42, 53, 54, 56, 58, 60, 62, 66, 68, or 71, wherein the processing and control circuit comprises a microprocessor, and the memory means comprises a non-volatile memory. 45
73. A method of validating items of currency, in which n independent measurements of the item are made, where n is an integer greater than 1, so as to define a vector in n -dimensional space, and wherein a stored look-up table is checked to determine whether the vector is stored therein, the method comprising the step of deeming the item genuine in dependence on the result of that determination. 50
74. A method in a coin, bill or currency item validation apparatus for establishing an item acceptance cluster for distinguishing between a genuine item of a specified denomination and non-genuine items, comprising the steps of: 55
- establishing a first acceptance limit for a first item characteristic;
 - establishing a second acceptance limit for a second item characteristic;
 - defining a two dimensional spatial item acceptance cluster for the specified item denomination based on the first acceptance limit and

the second acceptance limit; and

selectively modifying the item acceptance cluster to exclude known non-genuine items.

75. A method in a coin, bill or other currency item validation apparatus for establishing an item acceptance cluster for distinguishing between a genuine item and a non-genuine item, comprising the steps of:
- establishing a first acceptance limit for a first item characteristic;
 - establishing a second acceptance limit for a second item characteristic;
 - establishing a third acceptance limit for a third item characteristic;
 - defining a three dimensional spatial item acceptance cluster for the specified item denomination based on the first acceptance limit and the second acceptance limit and the third acceptance limit; and
 - selectively modifying the item acceptance cluster to exclude known non-genuine items.
76. The method of claim 75 also comprising the step of storing the data for the item acceptance cluster in a three-dimensional look-up table.
77. The method of claim 76 wherein the data in the look-up table is sorted.
78. A method in a coin, bill or other currency item validation apparatus for changing item acceptance criteria in response to certain types of non-valid items, comprising the steps of:
- establishing a first acceptance limit for a first item characteristic;
 - sensing a first characteristic of an unknown item;
 - producing a first output signal in response to the sensing of the first characteristic of the unknown item;
 - calculating the difference between the first output signal and the first acceptance limit; and
 - modifying the first acceptance limit if the value of the first output signal exceeds the first acceptance limit and the difference between the value of the first output signal and the first acceptance limit is less than a predetermined amount.
79. The method of claim 78 wherein the step of modifying the first acceptance limit further comprises moving the value of the first acceptance limit away from the value of the first output signal.

80. A method in a coin, bill or other currency item validation apparatus having a coin sensor circuit, for adjusting an item acceptance limit comprising the steps of:

- testing a plurality of known genuine items of a specified denomination using the coin sensor circuit;

- producing a first output signal for each genuine item of the specified denomination, each first output signal indicative of a first characteristic of the respective genuine item;

- computing a first reference value based on a function of all of the first output signals;

- establishing a first acceptance limit for the first item characteristic based on the first reference value;

- testing an unknown item in the apparatus using the coin sensor circuit;

- producing a second output signal in response to the testing of the unknown item, the second output signal being indicative of the first characteristic of the unknown item;

- calculating the difference between the value of the second output signal and the first acceptance limit;

- setting a first deviation limit between the reference value and the first acceptance limit; and

- modifying the first acceptance limit if the value of the second output signal is less than both the first acceptance limit and the first deviation limit.

81. The method of claim 80 wherein the step of modifying the first acceptance limit comprises adjusting the reference value.

82. The method of claim 80 or 81 also comprising the steps of:

- establishing a second acceptance limit based on the first reference value wherein the first and second acceptance limits are symmetrically located about the reference value;

- calculating the difference between the value of the second output signal and the first acceptance limit;

- setting a second deviation limit between the reference value and the second acceptance limit; and

- modifying the second acceptance limit if the value of the second output signal is less than both the second acceptance limit and the second deviation limit.

83. The method of any one of claims 43 to 52 wherein the sensor produces a signal whose frequency is indicative of an item characteristic.

84. Apparatus having means for performing each of the steps of a method according to any one of claims 12 to 31, 33, 36 to 40, 43 to 52, 55, 57, 59, 61, 63 to 65, 67, 70, 71, and 73 to 83.

5

10

15

20

25

30



35

40

45

50

55

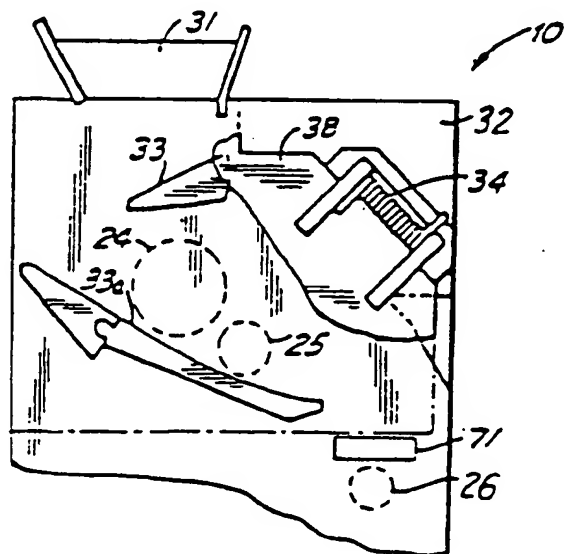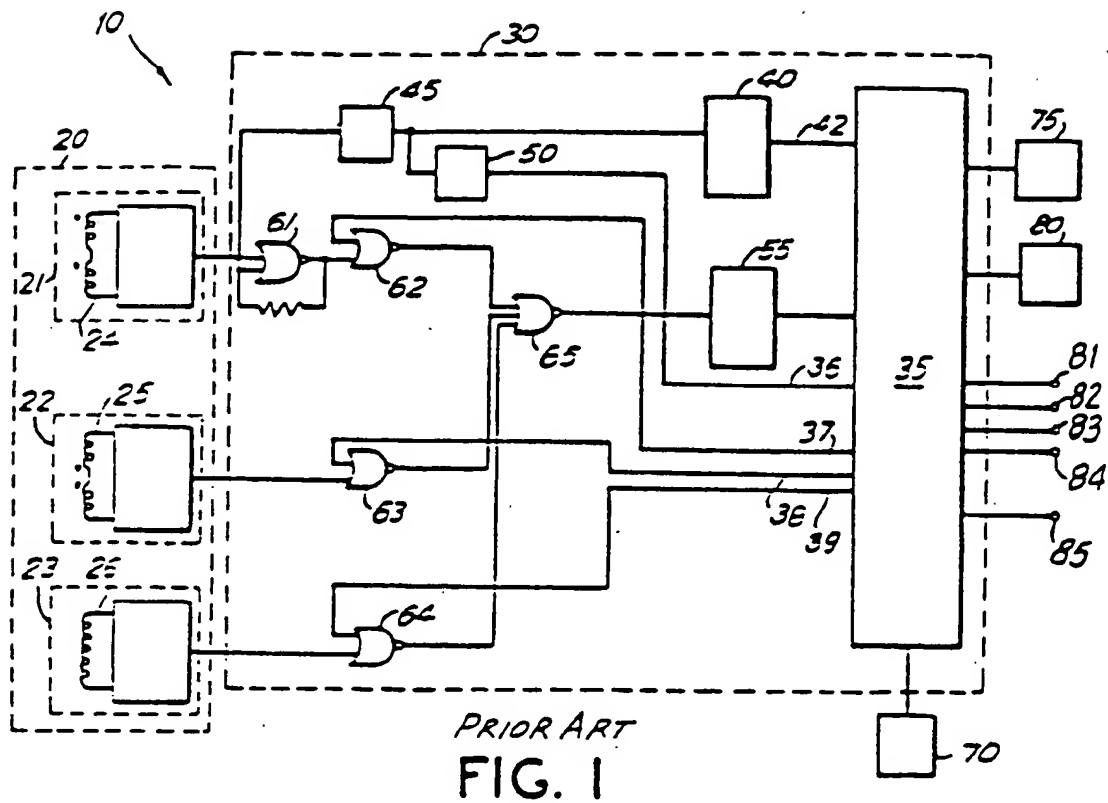

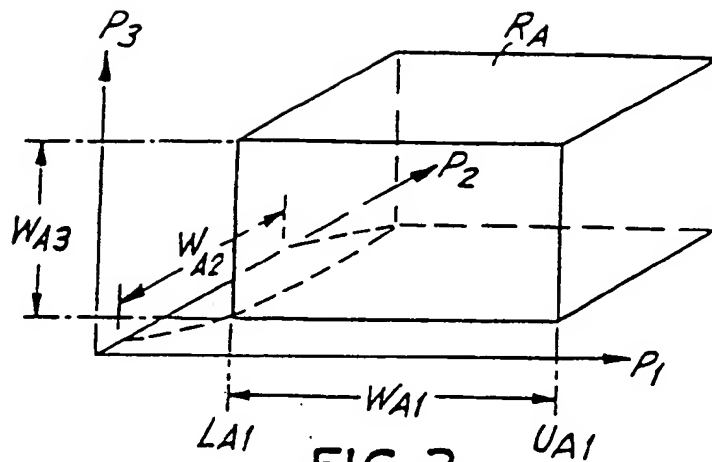


FIG. 3

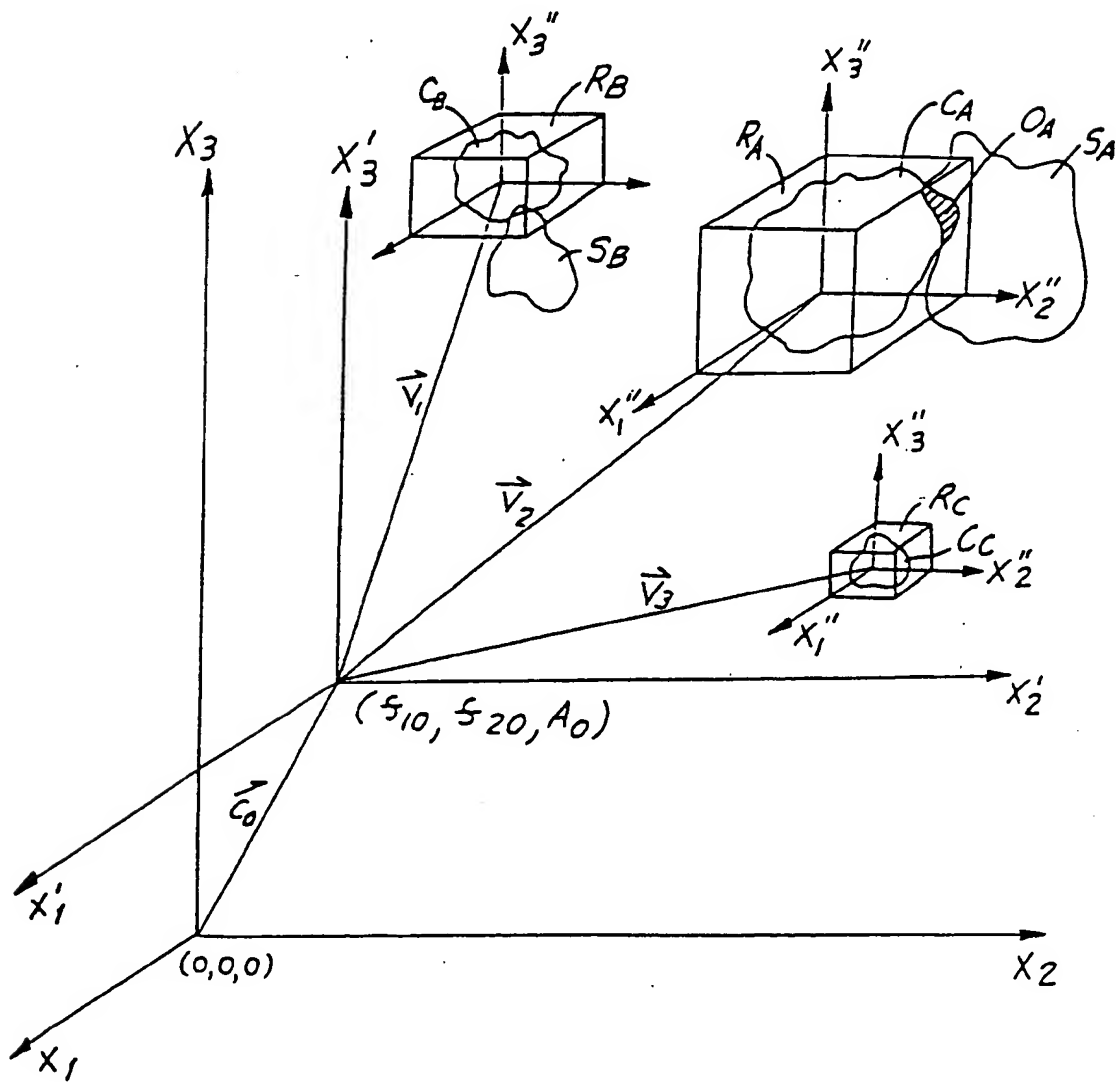


FIG. 4

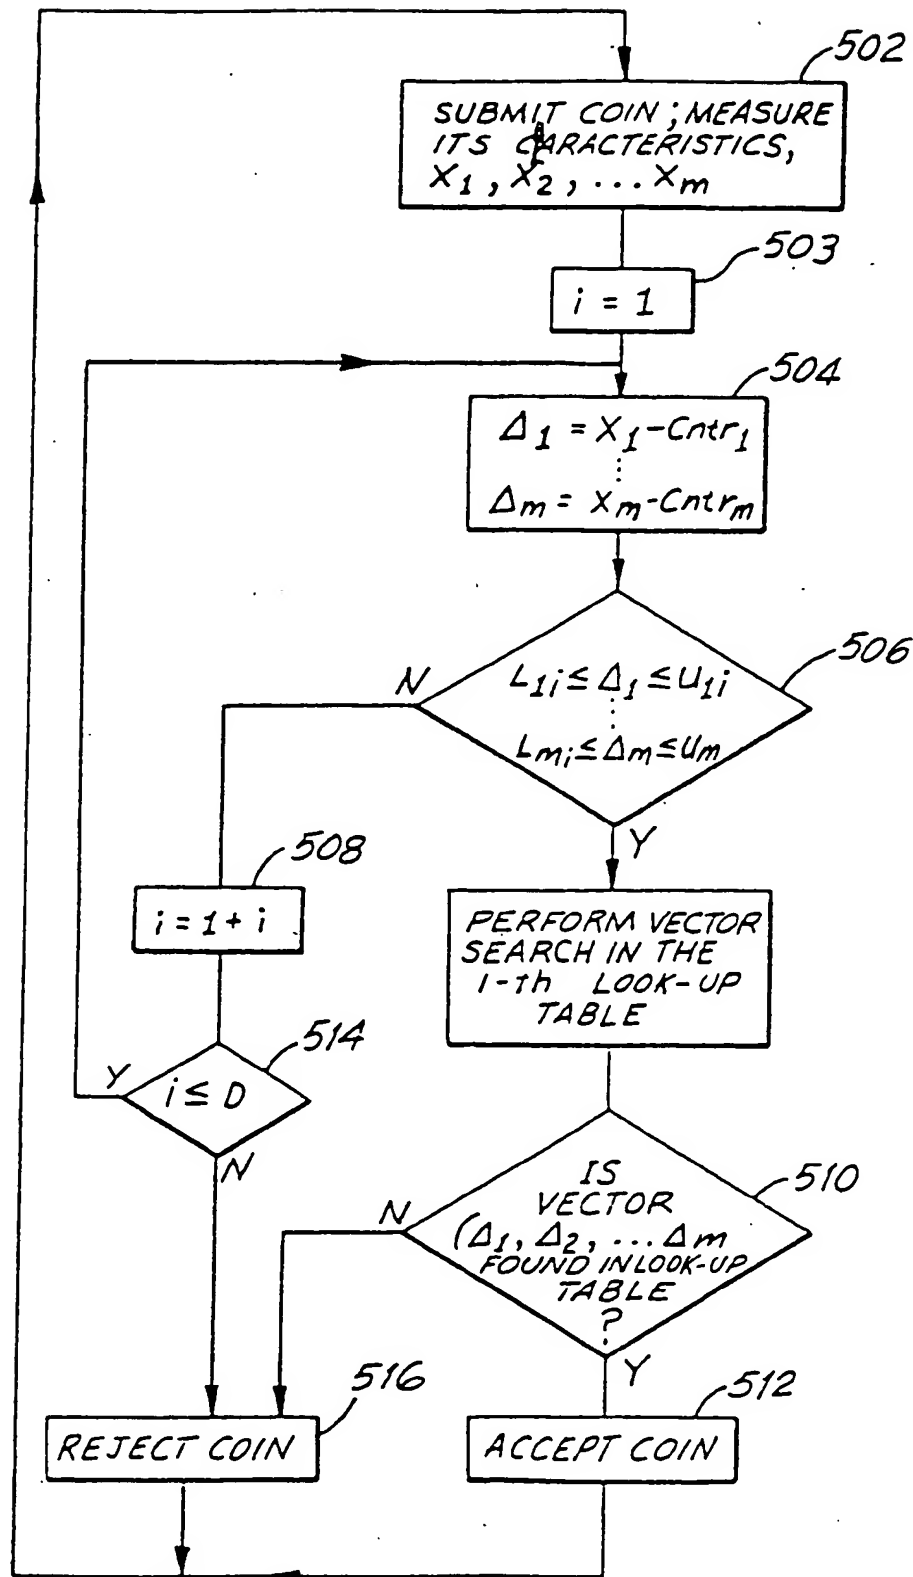
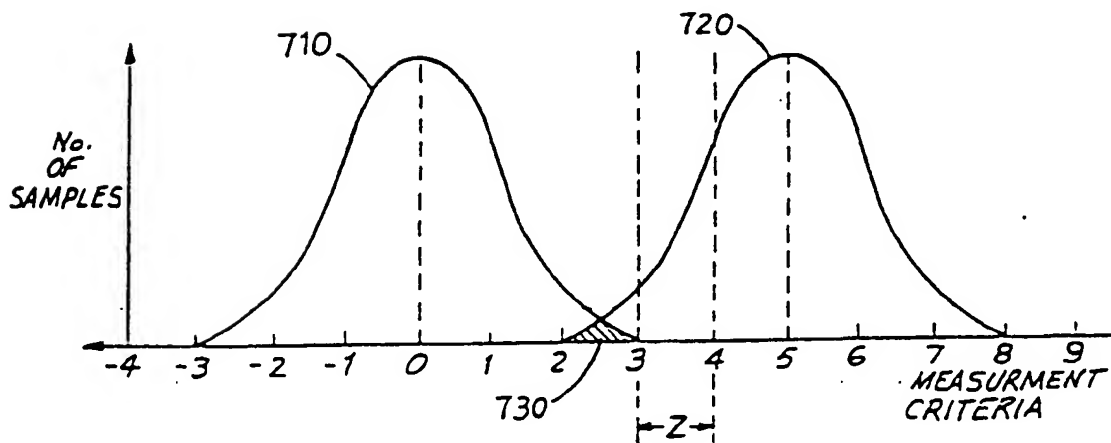
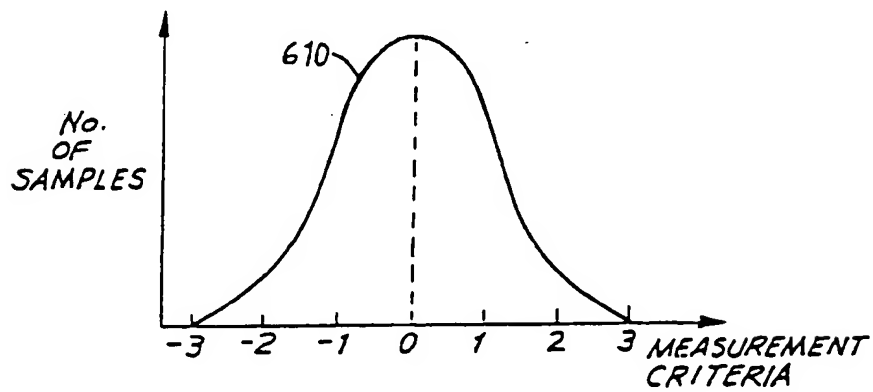
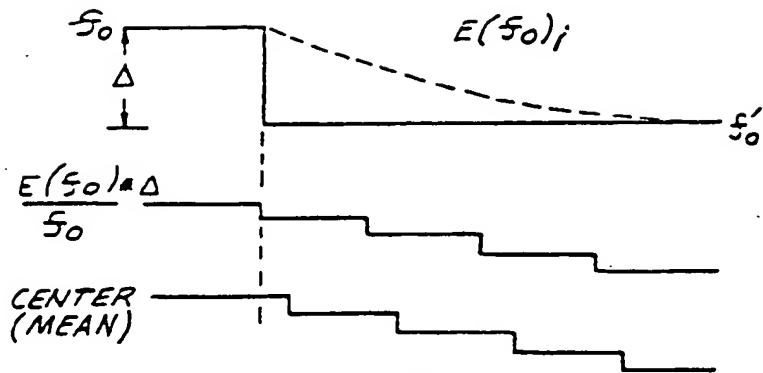


FIG.5



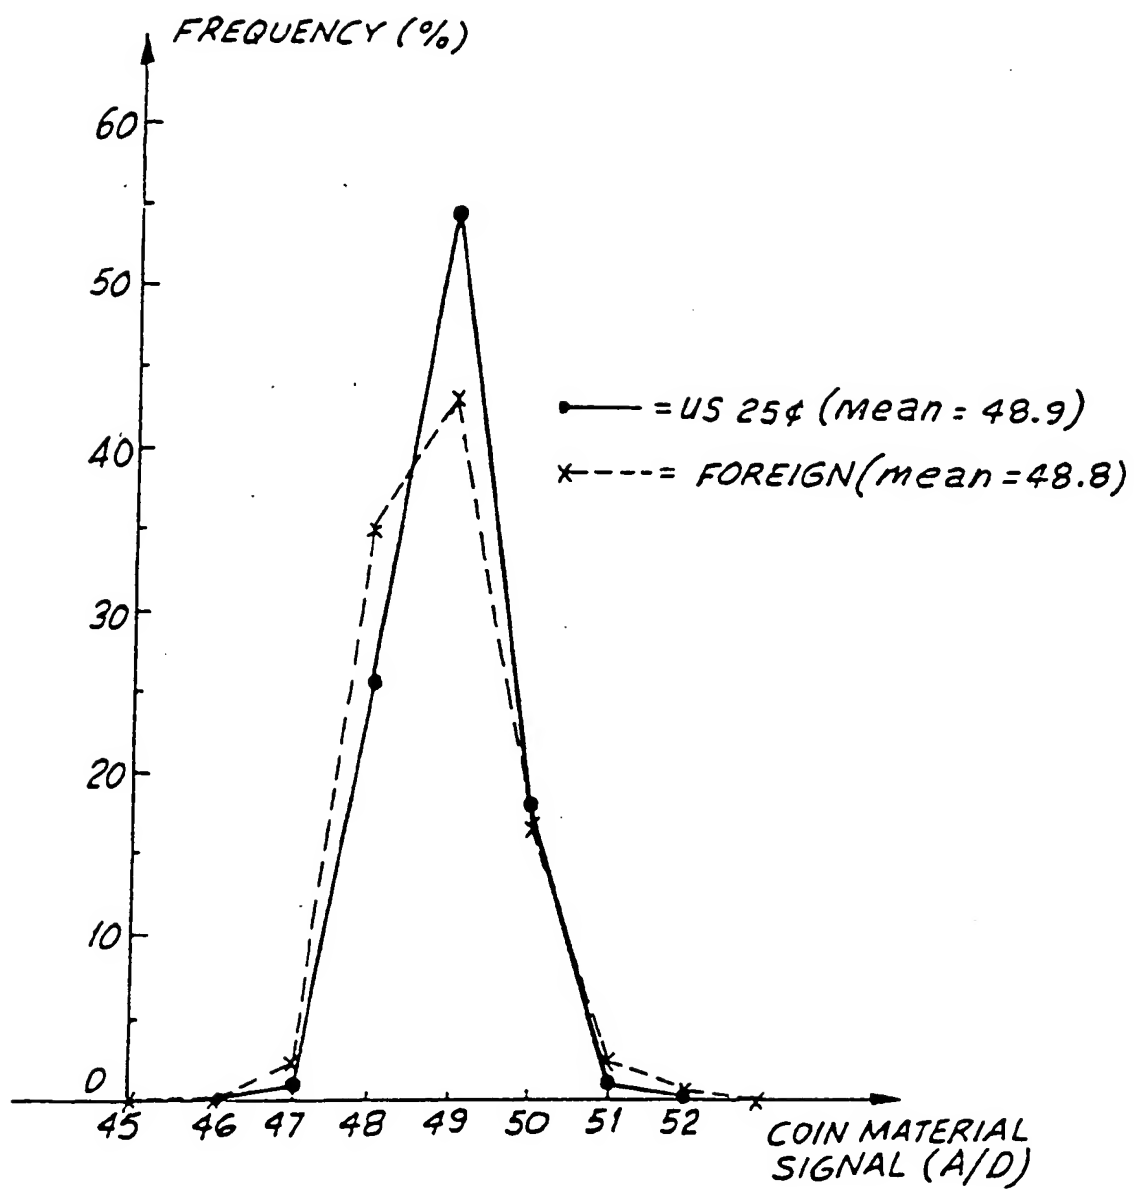


FIG.7B

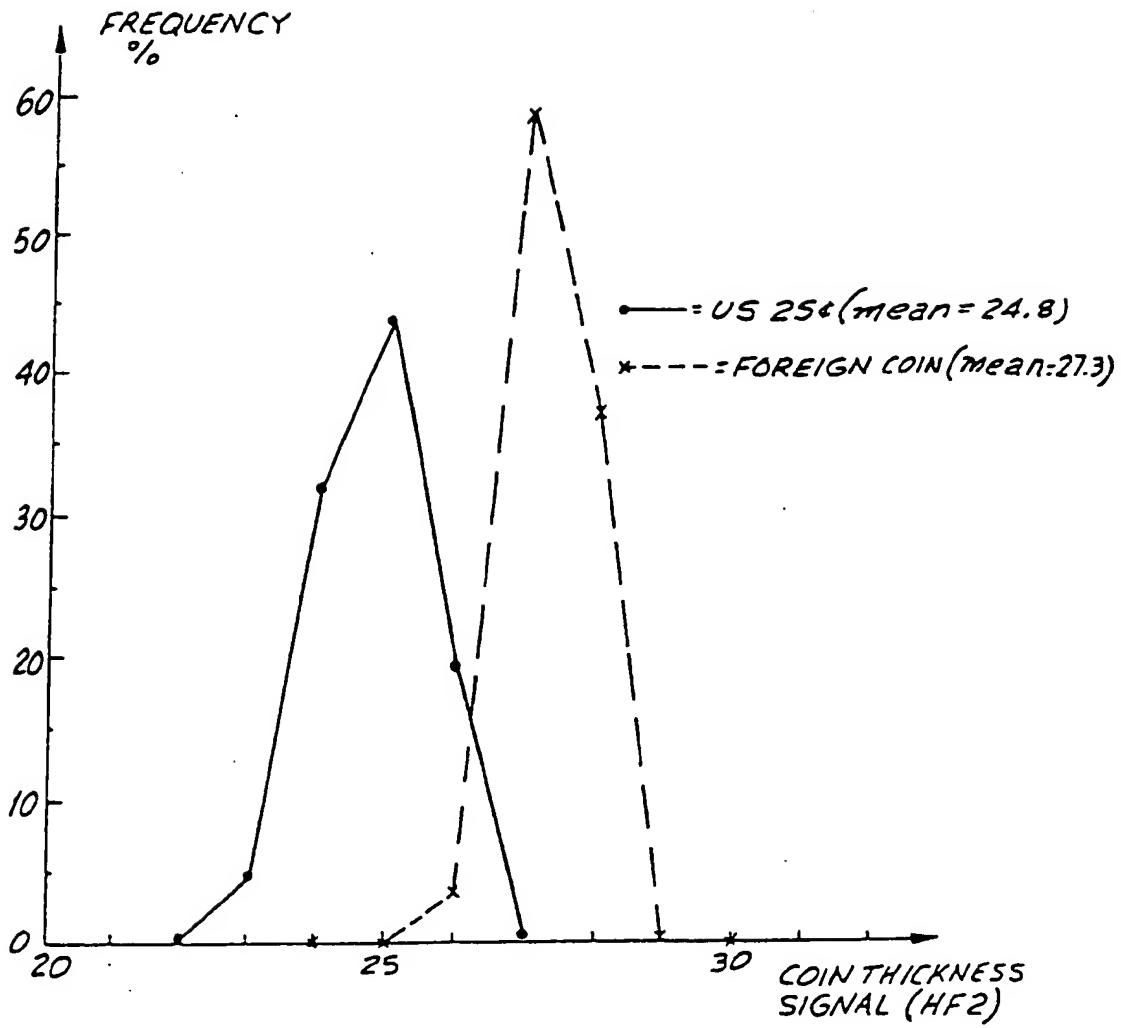


FIG.7C

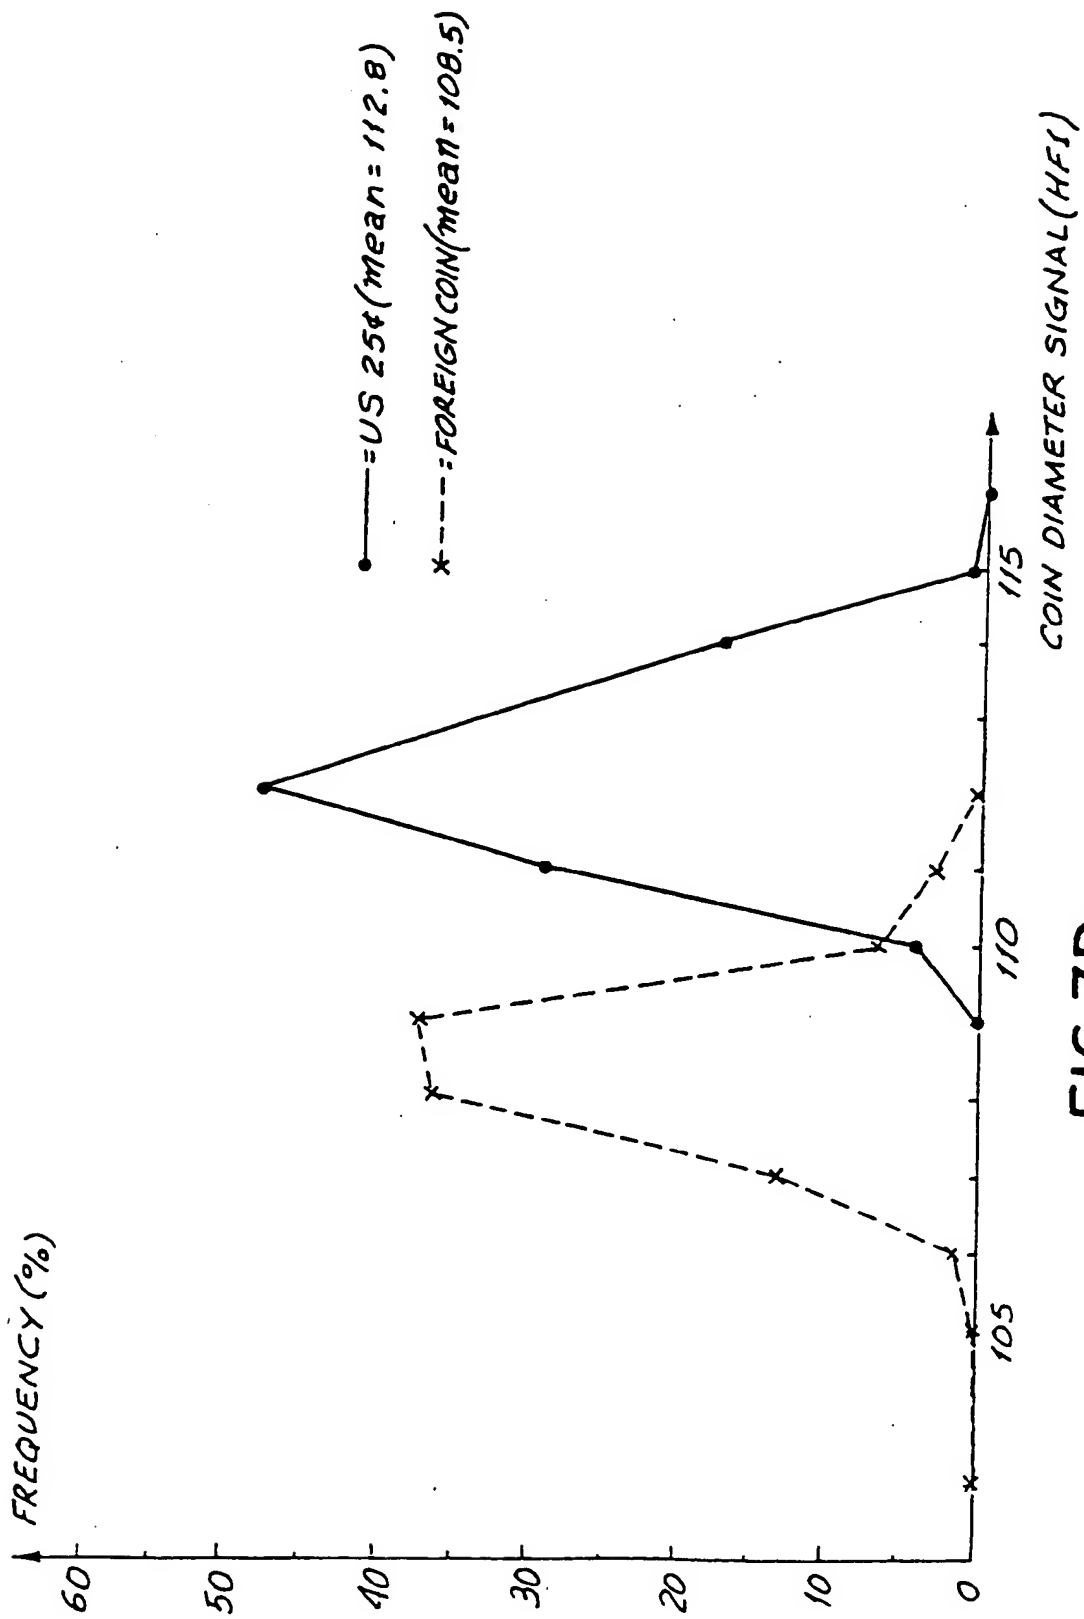


FIG.7D

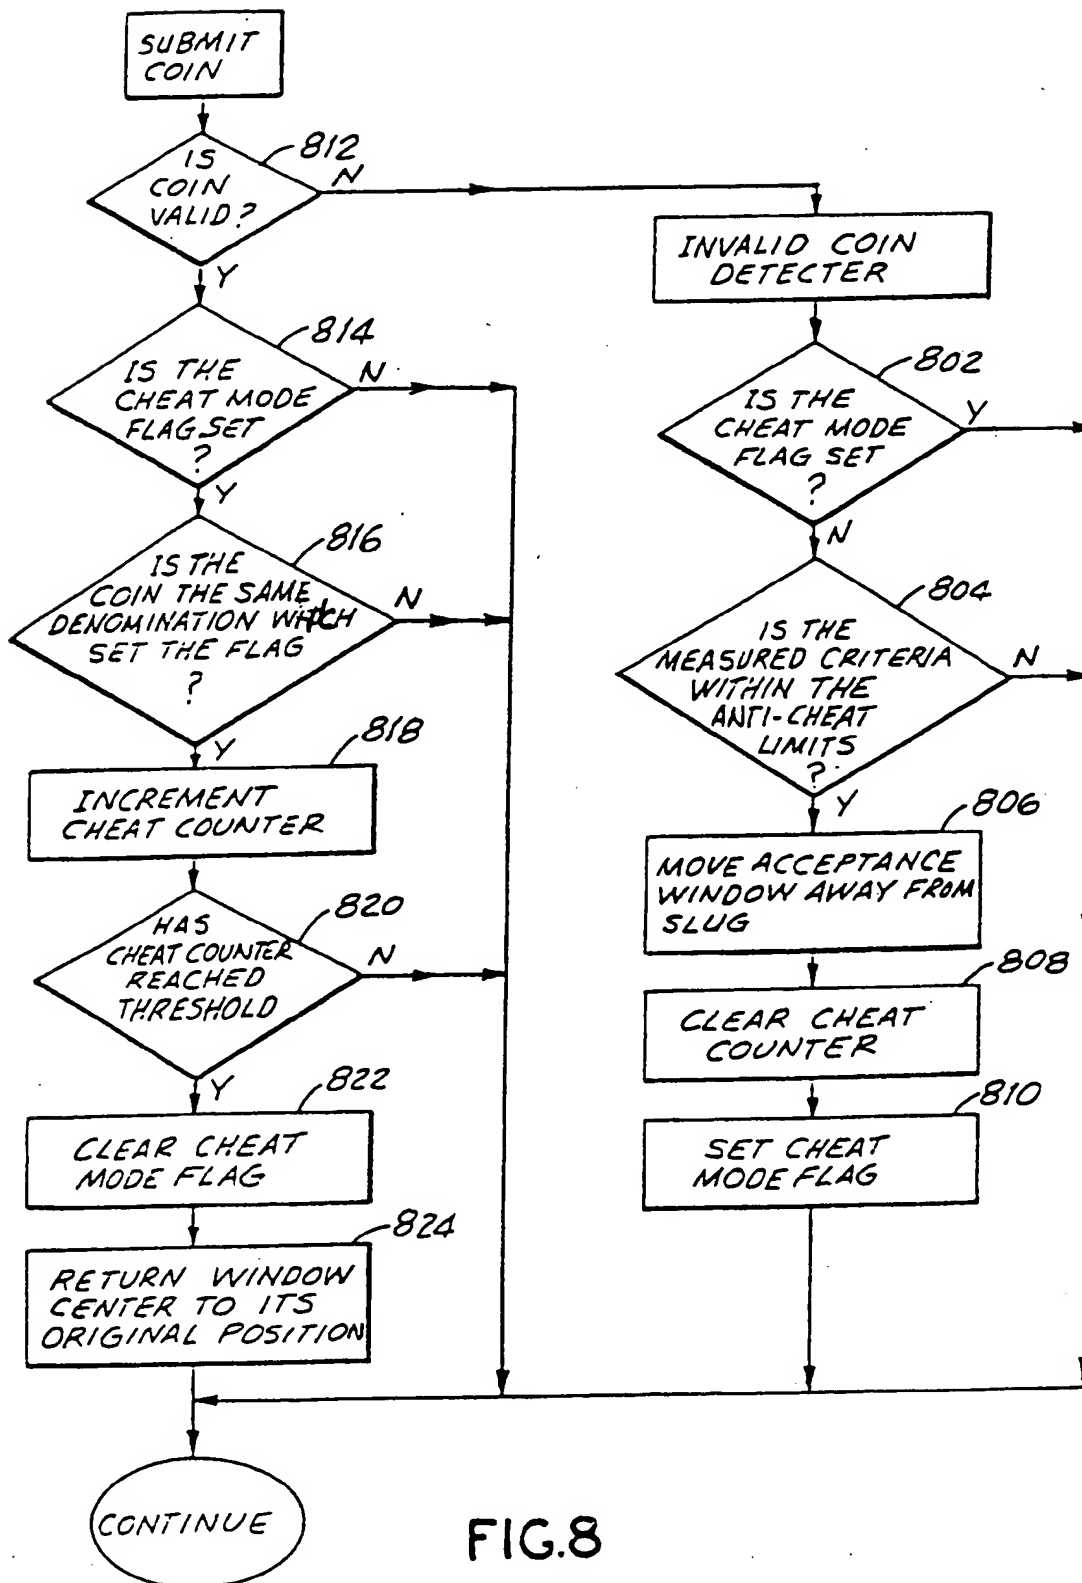


FIG.8

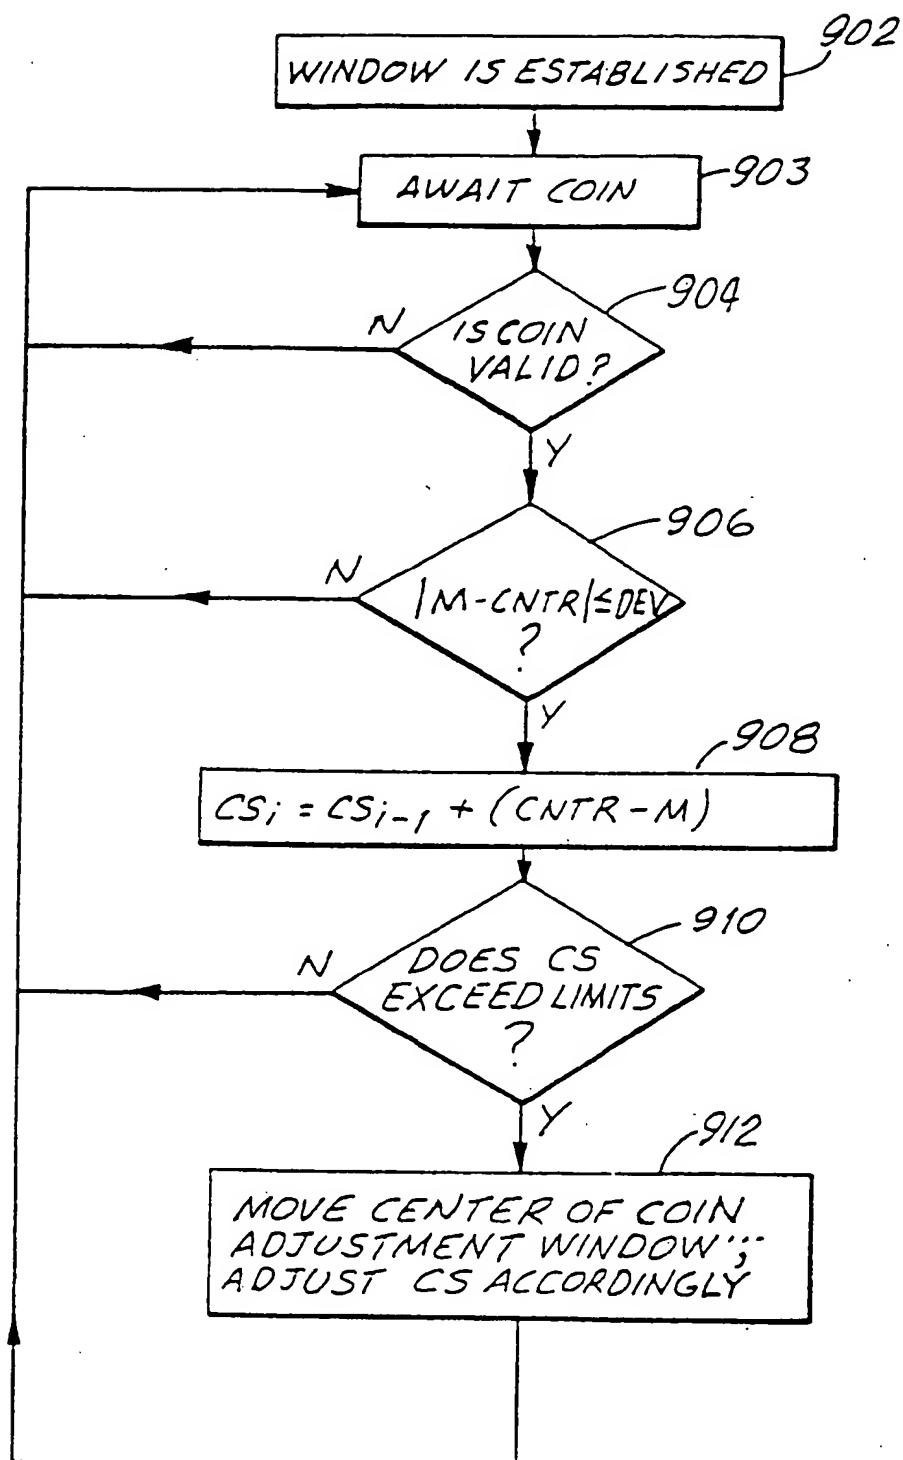


FIG. 9


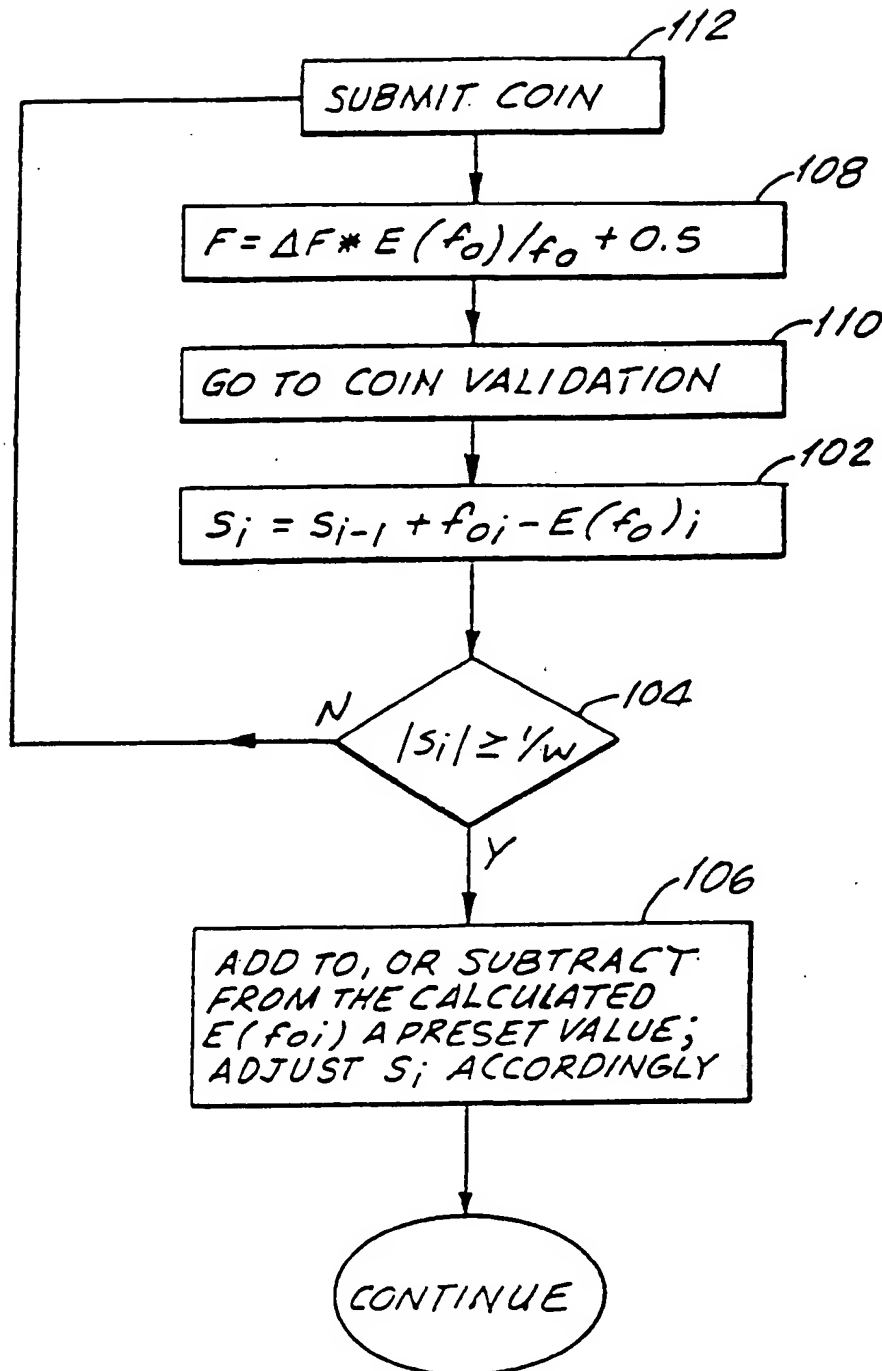


FIG. 10



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 685 826 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
12.11.1997 Bulletin 1997/46

(51) Int. Cl.⁶: G07F 3/02

(43) Date of publication A2:
06.12.1995 Bulletin 1995/49

(21) Application number: 95112445.2

(22) Date of filing: 10.10.1991

(84) Designated Contracting States:
CH DE ES FR GB IT LI

(30) Priority: 10.10.1990 US 595076

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
91309351.4 / 0 480 736

(71) Applicant: MARS INCORPORATED
McLean, Virginia 22101-3883 (US)

(72) Inventors:

- Vaks, Jeffrey E.
Irvine, California 92714 (US)
- Dobbins, Bob M.
Villanova, PA 19085 (US)

(74) Representative:

Musker, David Charles et al
R.G.C. Jenkins & Co.
26 Caxton Street
London SW1H 0RJ (GB)

(54) Method and apparatus for improved coin, bill or other currency acceptance and slug or counterfeit rejection

(57) Methods and validation apparatus for achieving improved acceptance and rejection for coins, bills and other currency items. One aspect includes modifying item acceptance criteria by creating and defining three-dimensional acceptance clusters, the data for which are stored in look-up tables in memory associated with a microprocessor. A second aspect involves fraud prevention by temporarily tightening or readjusting item acceptance criteria when a potential fraud attempt is detected. A third aspect relates to minimizing the effects of counterfeit items such as slugs on the self-adjustment process for the item acceptance criteria. A final aspect relates to the calculation of a relative value of the acceptance criteria in order to conserve memory space and minimize computation time.

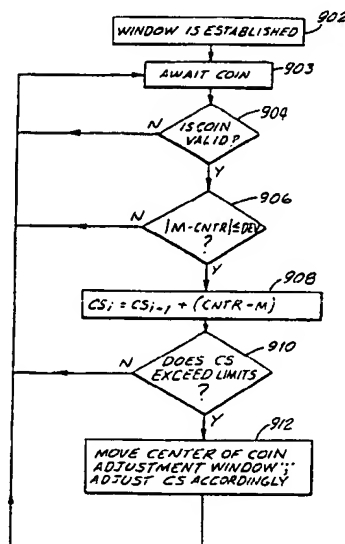


FIG. 9



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 95 11 2445

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|--|---|--|---|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.6) |
| Y | EP 0 367 921 A (ASCOM AUTELCA AG) 16 May 1990 | 1,32 | G07F3/02 |
| A | * claim 1; figure 6 * | 2-31, 33-84 | |
| Y,D | EP 0 155 126 A (MARS INC) 18 September 1985 | 1,32 | |
| A | * claim 7; figure 1 * | 2-31, 33-84 | |
| A | US 4 749 074 A (UEKI TORU ET AL) 7 June 1988 | 1-84 | |
| A | * claim 1; figure 4 * | 1-84 | |
| A | EP 0 384 375 A (URMET SPA) 29 August 1990 | 1-84 | TECHNICAL FIELDS SEARCHED (Int.Cl.6) G07F |
| A | * claim 1; figure 2 * | 1-84 | |
| A | DE 26 46 025 A (SIEMENS AG) 13 April 1978 | 1-84 | |
| A | GB 2 062 854 A (TOKYO SHIBAURA ELECTRIC CO) 28 May 1981 | 1-84 | |
| | * claim 1; figure 4 * | | |
| The present search report has been drawn up for all claims | | | |
| Place of search THE HAGUE | | Date of completion of the search 3 September 1997 | Examiner Kirsten, K |
| CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document | | | |

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant..

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.